


Modeling Breaking Changes in AAI

Jimmy Forsyth, AT&T, AAI PTL Chandra Cinthala, AT&T

2 April 2019

- A&Al uses <u>Janusgraph</u> for persistence which is a property graph model, where a graph is a set of vertices with edges between them.
- JanusGraph stores graphs in adjacency list format which means that a graph is stored as a collection of vertices with their adjacency list.

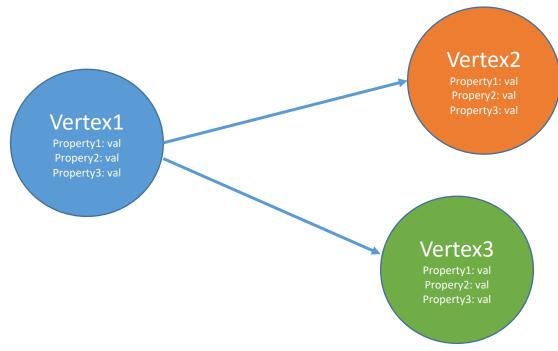

 The adjacency list of a vertex contains all of the vertex's incident edges (and properties).

Vertex1

Property1: val Propery2: val Property3: val org.onap.relationships.inventory.EdgeLabel1 (out from v1)

org.onap.relationships.inventory.EdgeLabel2 (out from v1)

org.onap.relationships.inventory.EdgeLabel3 (out from v2)

Vertex2

Property1: val Property2: val Property3: valh

A vertex is the fundamental unit of the graph and represents an object.
 Vertex can have properties to describe the object.

Vertex1

aai-node-type: Generic-VNF

vnf-id: 8372929

vnf-name: VNF1

prov-status: Active

model-id: 930183-09203-0039

model-invariant-id: 384792


nf-type: Type1

 An edge is a connection between two vertices that expresses a relationship between them. An edge can have a multiplicity, direction, and properties.

```
"from": "vf-module",
    "to": "generic-vnf",
    "label": "org.onap.relationships.inventory.BelongsTo",
    "direction": "OUT",
    "multiplicity": "MANY2ONE",
    "contains-other-v": "!${direction}",
    "delete-other-v": "!${direction}",
    "prevent-delete": "NONE",
    "default": "true",
    "description":""
},
```

- Traversal is the process of analyzing a graph's structure.
- Traversals discover and returns information about edges, vertices, and their properties.
- In graph databases, the relationship is a primary component of the data model and traversing from vertex to edge to vertex and beyond is the primary mechanism for querying the data within the model.

 Traversal Example: A custom query that starts at a generic-vnf, follows the edge to the service-instance, then gets all connected vnfs and their vf-modules.

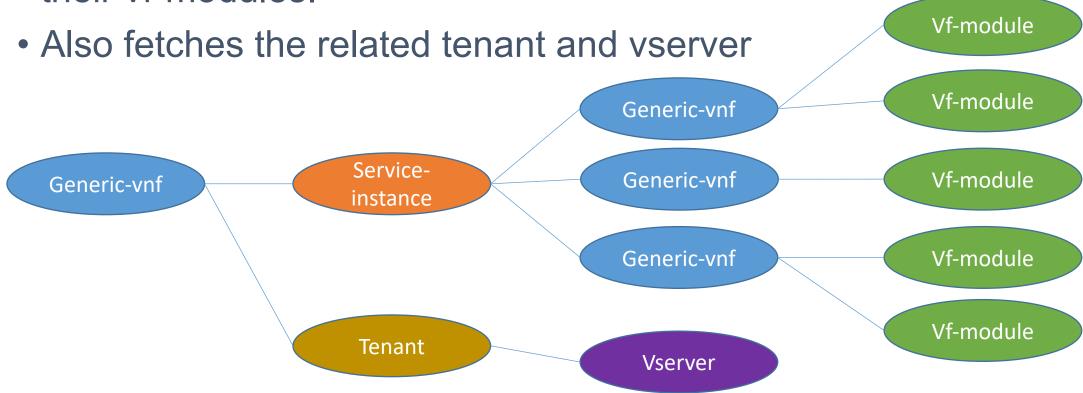

AAI Model Change Guidelines

- AAI tries to provide backward compatibility between versions of the API
- Extra properties are ignored
- Changes tend to be additive
- In Dublin, AAI is providing support for v11 (Amsterdam), v12, v13 (Beijing), v14 (Casablanca), v15, and v16 (Dublin)
- v12 and v15 are ECOMP contributions and can be used by clients, but we document the official ONAP versions on the wiki

AAI Model Change Guidelines

- Schema Change Guidelines:
- Design for query ability: The query patterns drive the graph data model
 - Model Vertices for entities
 - Node Properties
 - Represent entity attributes, metadata
 - Model Edges for structure
 - Express connections between entities/vertices
 - Establish semantic context for each entity
 - Relationship Properties
 - Express strength, weight or quality of the relationship or metadata
- Properties vs Relationship
 Use relationships when you need to establish semantic context/connection
 between vertices AND/OR the property value comprises of a complex value
 type.
 - Example: Find all pservers in cloud-region/zone (complex value type)

AAI Model Change Guidelines

- Use properties when there's no need to qualify the relationship AND the attribute value comprises a simple value type
 Example: Find all pservers of same equip-type.
 Small property lookup on a node will be a less expensive operation than traversing a relationship. However, many small properties on a node, or a lookup on a large string or large array property will impact performance.
- Try to use UUID property as the unique identifier for all vertices
- A Traversal Query is always better than using many GETs to traverse multiple nodes.

AAI Model Change Guidelines – Things to AVOID

- Modeling entities as relationships
- Lots of attribute-like properties
- Property value redundancy
- Adding arbitrary properties to a vertex but rather use vertex and edge
- Using vertex property as a foreign key but rather use relationship/edge to the other vertex.
- Don't overload a property
 - E.g.: using single "type" property for representing type/role/function of the node.

Case Study: PNF for 5G Plug and Play Use Case

- The PNF object is an example of an object that violates our own rules "Try to use UUID property as the unique identifier for all vertices"
- The change to PNF was proposed in Dublin <u>https://wiki.onap.org/display/DW/Proposal+to+Change+AAI+PNF+Entity+to+use+PNF-ID+as+key</u>
- PNFs were initially stored in pserver
- Pserver has hostname as the key (likely a mistake)
- PNF was cloned from pserver, so pnf-name used as key (definitely a mistake)
- The fact that pnf-id is described as a UUID really intends for the pnf-id to have a unique id within the context of an ONAP instance, although future use cases might lead us to want it to be universally unique

Case Study: PNF for 5G Plug and Play Use Case

- Manage PNFs and VNFs as alike as possible, i.e., like network functions
- Default the SourceName in the ONAP Aware Software on the PNF to [VVV][Serial#] but permit the operator to set it to a value following their own naming conventions (just as they would do with a VNF name).
- Support PNF plug and play flow
- Establish future direction for operators to be able to use network functions in topologies without specifying whether they are PNFs or VNFs (let the orchestrator use, e.g., policy to resolve)

Case Study: PNF for 5G Plug and Play Use Case

- When this change was proposed, no operators were using PNF objects in their deployments
- The time to do this change would have been Casablanca but the proposal came too late to get concurrence from all projects for a breaking change
- During the Casablanca/Dublin timeframe, the PNF object started being used by carriers – migration strategy needed!
- The JanusGraph schema is always built using the latest version of the AAI data model – key change is a breaking change for all versions of the API since it can't be backward compatible

Aligning the AAI Data Model

- There are other object types that are "incorrectly" modelled in AAI, according to the guidelines
- Other Examples of non-uuid keys:
 - dvs-switch uses switch-name
 - instance-group uses id instead of instance-group-id
 - I-interface, lag-interface, and p-interface all use interface-name
 - lag-link uses link-name
 - network-profile uses nm-profile-name
 - physical-link uses link-name
 - platform uses platform-name
 - project uses project-name
 - pserver uses hostname
 - service-subscription uses service-type

Handling Breaking Changes in AAI

- The pnf-name to pnf-id key change highlights the issue of making changes on objects that have data in existing deployments
- Care in aligning the AAI data model up-front will save grief down the road
- AAI is socializing the PNF key change in the Dublin release notes so providers can attempt to mitigate the need for migration
- The modeling subcommittee's recommendations should be informed by the existing AAI data model
- AAI is undertaking to produce a UML model in papyrus based on the AAI data model, but existing tooling is unable to process the enormous AAI REST API
- Should the ONAP community have a global strategy for handling these kinds of migrations?

AAI Model Browser

AAI Model Browser provides a unified view of AAI data model by combining the edge rules, OXM schema files in a single interface. It allows users to study the AAI data model by focusing on specific objects, shows relationships between objects, and also provides insights into how objects have changed across releases



TO edges		Object Type: vpls-pe Description: VPLS Provider Edge routers.										
lag-interface												
<u>p-interface</u>	attr	attr Type Description		Key	ldx	Srch	Req					
	equipment-name	java.lang.String		true	yes		yes					
	equipment-role	java.lang.String	Client should send valid enumerated value, e.g., VPLS-PE.	false								
	ipv4-oam- address	java.lang.String	Address tail-f uses to configure generic-vnf, also used for troubleshooting and is IP used for traps generated by GenericVnf (v4-loopback0-ip-address).	false								
			Trigger for operational monitoring of this VNF									

Description: VPLS Provider Edge routers.							
attr	Туре	Description		ldx	Srch	Req	ctag-pool
equipment-name	java.lang.String		true	yes		yes	
equipment-role	java.lang.String	Client should send valid enumerated value, e.g., VPLS-PE.	false				
ipv4-oam- address	java.lang.String	Address tail-f uses to configure generic-vnf, also used for troubleshooting and is IP used for traps generated by GenericVnf (v4-loopback0-ip-address).	false				
prov-status	java.lang.String	Trigger for operational monitoring of this VNF by BAU Service Assurance systems.	false	yes			
resource-version	java.lang.String	Used for optimistic concurrency. Must be empty on create, valid on update and delete.	false				
vlan-id-outer	java.lang.Long	Temporary location for stag to get to VCE	false				
lag-interfaces	inventory.aai.onap.org.v16.LagInterfaces	Collection of link aggregate interfaces.					
p-interfaces	inventory.aai.onap.org.v16.PInterfaces	Collection of physical interfaces.					
relationship-list	inventory.aai.onap.org.v16.RelationshipList						

FROM edges