
HOW ONAP ORCHESTRATES A CNF TO WRCP

bin.yang@windriver.com

Contents

Overview	3
Phase 1: WRCP installation and provisions.....	4
Phase 2: CNF development and validation.....	5
Phase 3: ONAP installation and provisions.....	8
Approach 1: deploy the whole stack from OpenStack, including Heat stack, k8s cluster, and ONAP instance.....	8
Approach 2: deploy the ONAP instance over WRCP (StarlingX 3.0).....	9
Step 1) Deploy nfs-server-provisioner	9
Step 2) Prepare namespace for ONAP deployment.....	11
Step 3) Deploy ONAP with integration override values.....	11
Step 4) Verify and checkpoints	12
ONAP provisions: Update SO configurations	13
ONAP Health Check.....	14
ONAP provisions: Populate demonstration data	14
Access to ONAP portals.....	14
Phase 4: Register WRCP instance to ONAP.....	16
Step 1: Create a SO Cloud Site	16
Step 2: Create an AAI Cloud Region along with complex	16
Step 4: Add service type “cfw-k8s”:.....	23
Step 5: Associate subscription to Cloud Region:.....	24
Phase 5: CNF onboarding and service design	26
Step 1: create a tar ball for the CNF helm chart	26

Step 2: Wrap helm chart tar ball into a dummy heat template artifact.....	26
Step 3: Onboard the VSP artifact ‘cfwsriov1_vsp.zip’ into ONAP SDC	27
Phase 6: Service Instantiation hence CNF instantiation and validation	28
Step 1, Create service instance	28
Step 2, Add node instance ‘cfw1vf1’ for service instance ‘cfw1’.....	29
Step 3, Preload VNF topology	29
Step 4, prepare supplement data file	31
Step 5, Add VF Module	33
Step 6: validate the CNF deployment	33
Phase 7: Service deletion hence CNF deletion.....	35
Attachments	36
Attachment 1: integration-override.yaml.....	36
Attachment 2: onap-oom-lite.env	43
Attachment 3: base_dummy.yaml.....	51
Attachment 4: base_dummy.env.....	53
Attachment 5: Example output of ONAP Health Check.....	54
Attachment 6: Example output of populating ONAP demo data	59
Attachment 7: Dump ONAP components status	61
Debug Tips.....	67
Tip 1: Tear down ONAP instance:	67
Tip 2: Postman collections	67

Overview

This is a detailed How-To document to illustrate how users could leverage ONAP to orchestrate CNF to WRCP 19.12 instance.

The general deployment topology is depicted as diagram below:

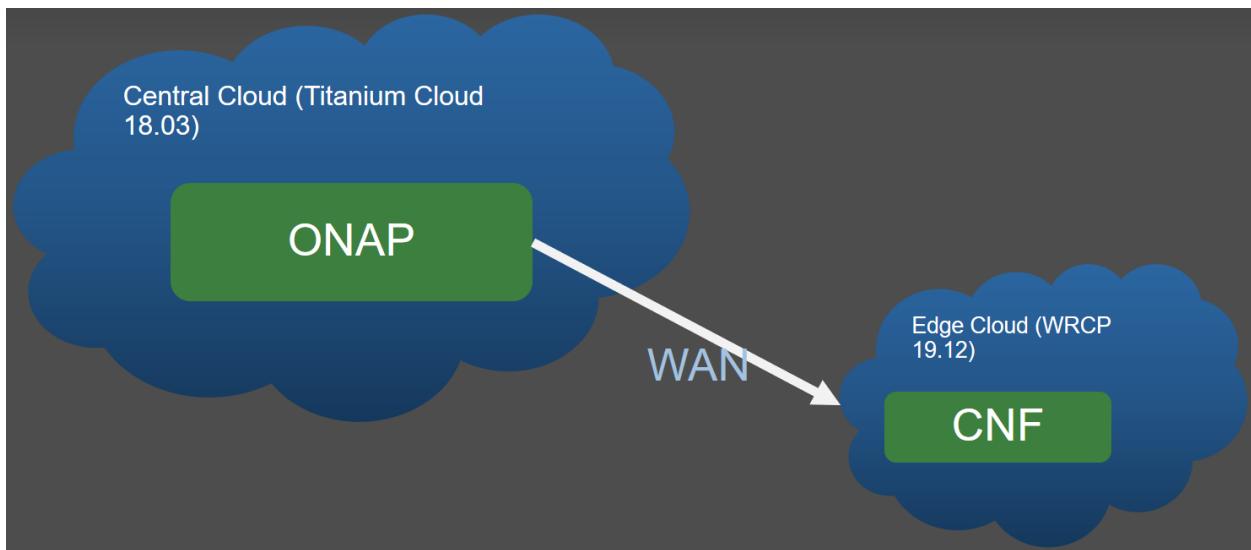


Diagram 1: ONAP and the cloud hosting it, WRCP, CNF topology

The comprehensive workflow consists of following phases:

- Phase 1: WRCP 19.12 installation and provisions
- Phase 2: CNF development and validation
- Phase 3: ONAP installation and provisions
- Phase 4: Register WRCP instance to ONAP
- Phase 5: CNF onboarding and service design
- Phase 6: Service Instantiation hence CNF instantiation and validation
- Phase 7: Service deletion hence CNF deletion

Phase 1: WRCP installation and provisions

WRCP (19.12 or later version) installation could be AIO Simplex, Duplex, and Standard type. WRCP Distributed Cloud mode is also supported

Due to CNF requiring multiple networking plane, the WRCP must be provisioned with:

- Datanetwork backend by SRIOV netdevice (at least 2 vlan ID to support 2 network planes of the cFW use case)
 - In case This SRIOV netdevice is not available, host netdevice passthrough could be used as well.
 - veth pair could also be used for demonstration purpose, with constraint that all pods should be scheduled to the same worker node
- Hugepage-2M: 512x2M for each NUMA node for worker nodes
- Dedicated Tenant and user with admin role
- Kubernetes service account with clusterrolebindings and privileges to operate various resource, including namespace, etc.

Phase 2: CNF development and validation

The CNF should be developed and validated over WRCP 19.12 directly (without ONAP's orchestration)

The example CNF is containerized Firewall use case (referred as cFW in context below):

<https://gerrit.onap.org/r/gitweb?p=multicloud/k8s.git;a=tree;f=starlingx/demo;h=44ab83ca5c5c9f01082695b1aa9a6e71fd4ec20;hb=HEAD>

It consists of 3 pods, connected through 2 network planes. The topology is depicted as below:

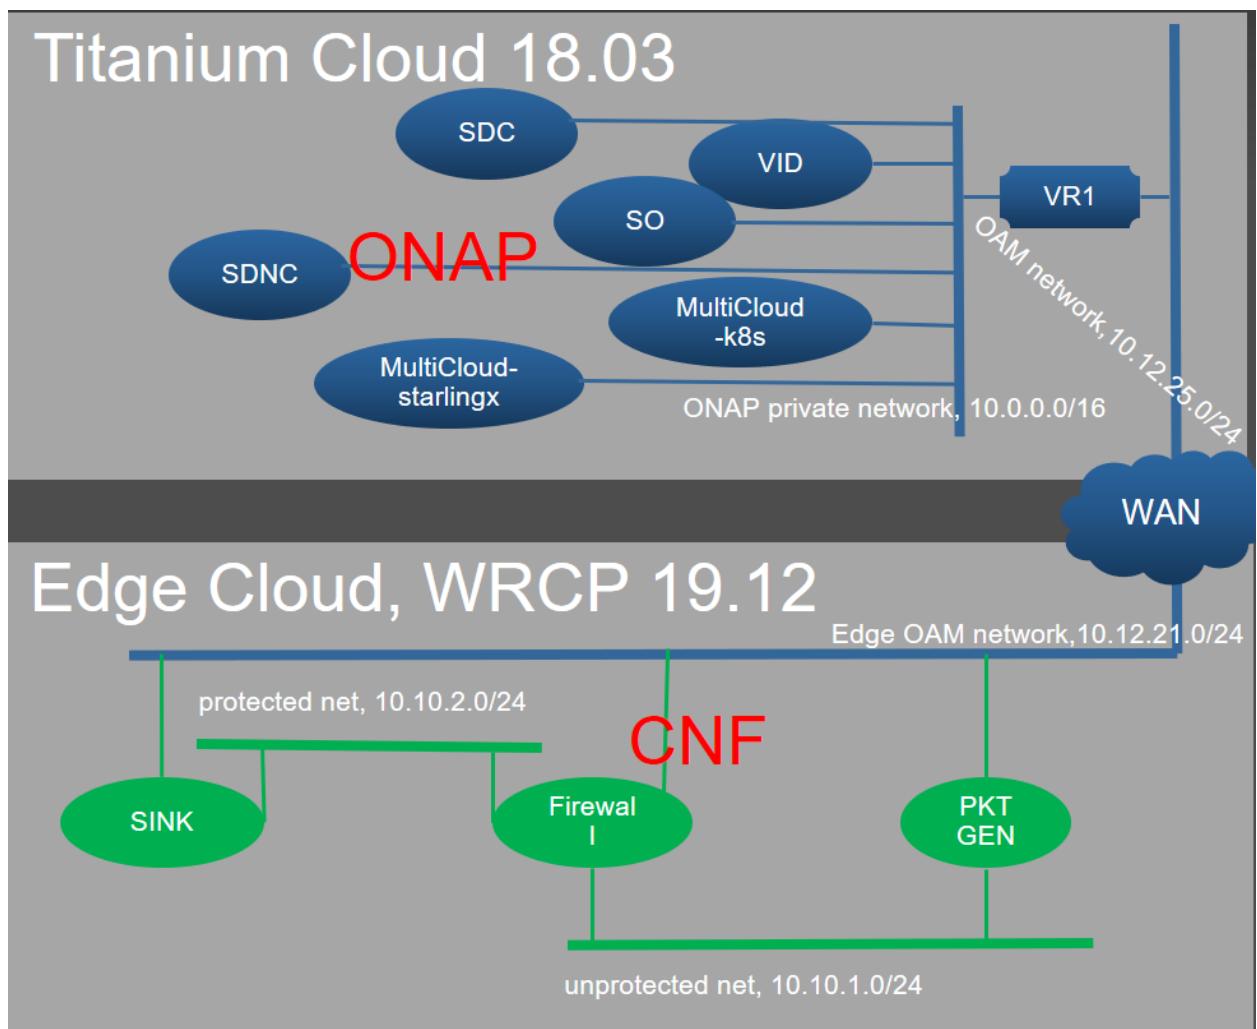


Diagram2: ONAP and cFW components

Use helm to validate the CNF,e.g. cFW:

```
$ git clone "https://gerrit.onap.org/r/multicloud/k8s"
```


```
$ cd k8s/starlingx/demo
```

```
$ helm install firewall-sriov -n cfw1
```

To validate of the deployed cFW, monitoring the traffic over SINK pod with your browser (Chrome, Firefox) to open following url (replace NODE_IP with any worker node IP of the WRCP instance):

[http://\\$NODE_IP:30667/](http://$NODE_IP:30667/)

You should observe traffic diagram likes below:

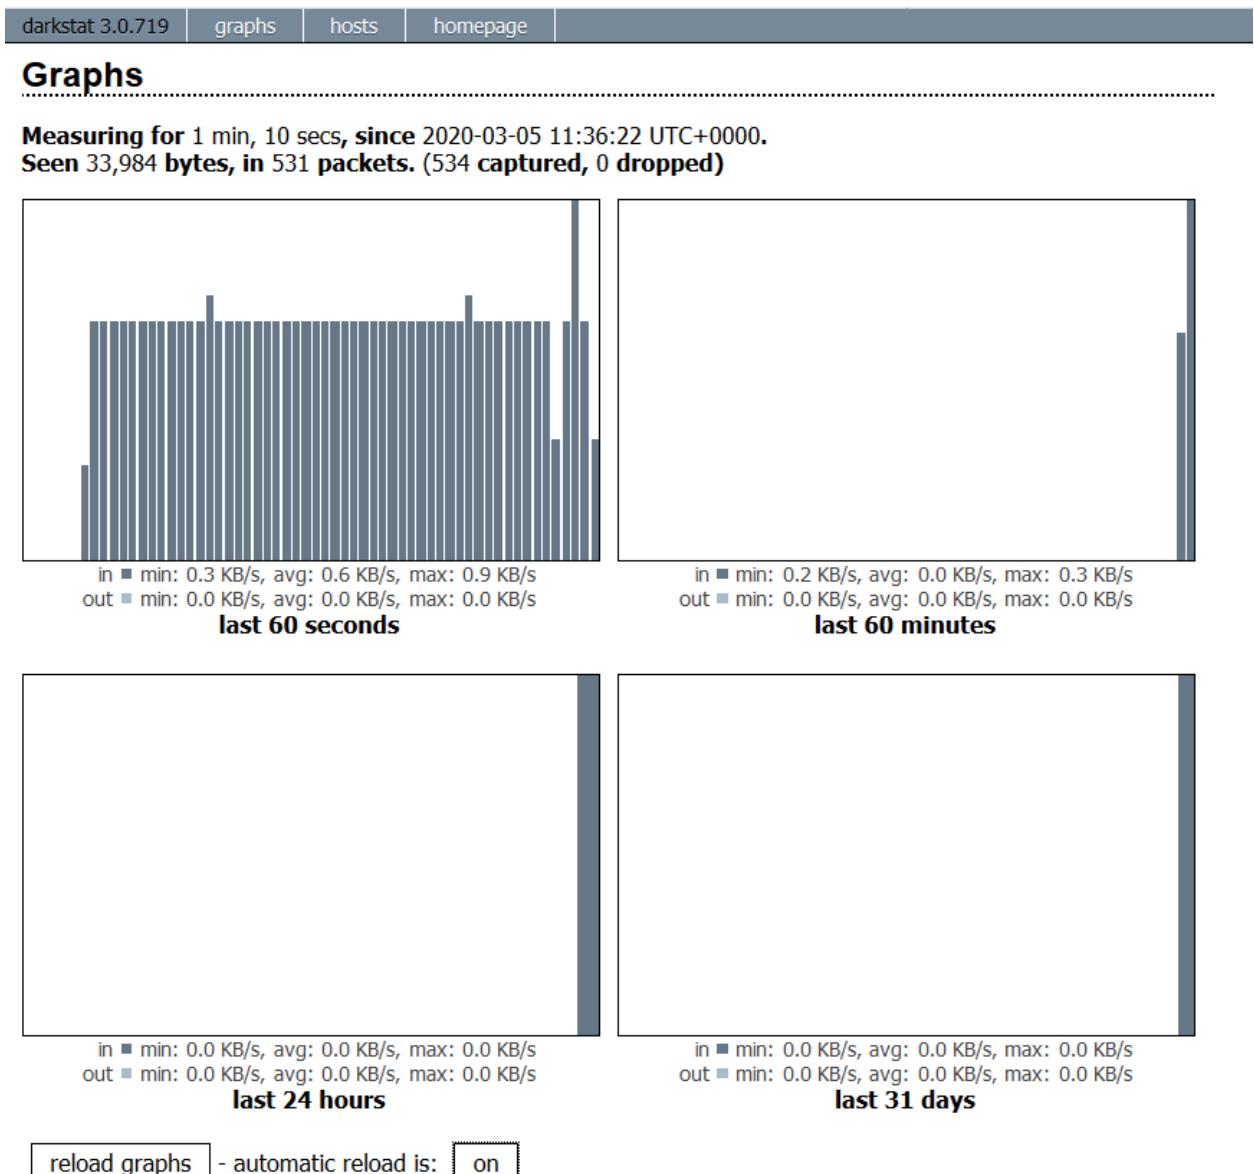

Snapshot 1: sink traffic monitor page

Phase 3: ONAP installation and provisions

Deploy ONAP instance with el alto release, with overrides to update multicloud services

There are 2 alternative approaches to deploy ONAP instance:

Approach 1: deploy the whole stack from OpenStack, including Heat stack, k8s cluster, and ONAP instance

prepare: download openrc file from openstack horizon, e.g. VIM-openrc

update the attached [onap-oom-lite.env](#) with openstack instance's information.

ONAP deployment might take hours so it is better to initiate the process by screen terminal:

```
$ screen -R onapdeploy  
$ git clone https://git.onap.org/integration  
$ cd integration/deployment/heat/onap-rke/  
$ copy the attached file as onap-oom-lite.env  
$ source <openrc file>  
$ ./scripts/deploy.sh -n 15 -s mctest1 -i elalto -o elalto  
onap-oom-lite.env
```

You should observe following message from screen terminal while bootstrap process is accomplished.

```
Cloud-init v. 18.2 running 'modules:final' at Mon, 02 Mar 2020 03:24:21 +0000. Up 18.87 seconds.  
Cloud-init v. 18.2 finished at Mon, 02 Mar 2020 04:17:14 +0000. Datasource DataSourceOpenStack [net,ver=2]. Up 3132.34 seconds  
+ exit 0
```

Snapshot 2: ONAP deployment bootstrap accomplished

Approach 2: deploy the ONAP instance over WRCP (StarlingX 3.0)

WRCP can also host ONAP. Due to kubernetes version difference , the upstream ONAP oom charts will be updated with following aspects:

- 1) Change the API versions (for deployment, statefulset, etc.) to “apps/v1”.
- 2) Use StorageClass “nfs” (by stable/nfs-server-provisioner) for PVC requiring ReadWriteMany access mode.
- 3) Use default StorageClass “general” (by ceph rbd-provisioner) for PVC without requiring ReadWriteMany access mode.
- 4) Fixing bug

The changes above introduce so many patches to oom charts, for now, they are maintained over the forked oom repos:

<https://github.com/biny993/oom/tree/elalto-wrcp19.12>

<https://github.com/biny993/aai-oom/tree/elalto-wrcp19.12>

<https://github.com/biny993/testsuite-oom/tree/elalto-wrcp19.12>

Note: The resource usage by ONAP installation with default override values (<https://github.com/biny993/oom/blob/elalto-wrcp19.12/integration-override.yaml>) :

CPU: 11 cores; Memory: 32GB, Persistence Volume: 80GB

Step 1) Deploy nfs-server-provisioner

Clone the helm charts:

```
git clone https://github.com/helm/charts.git
cd charts
```

Change the default values as below:

```
diff --git a/stable/nfs-server-provisioner/values.yaml b/stable/nfs-server-provisioner/values.yaml
index 6da0e1327..75807cdac 100644
--- a/stable/nfs-server-provisioner/values.yaml
```

```
+++ b/stable/nfs-server-provisioner/values.yaml
@@ -35,7 +35,7 @@ service:
  externalIPs: []

persistence:
- enabled: false
+ enabled: true

## Persistent Volume Storage Class
## If defined, storageClassName: <storageClass>
@@ -47,7 +47,7 @@ persistence:
  # storageClass: "-"

accessMode: ReadWriteOnce
- size: 1Gi
+ size: 180Gi

## For creating the StorageClass automatically:
storageClass:
@@ -77,7 +77,7 @@ storageClass:

## For RBAC support:
rbac:
- create: true
+ create: false

## Ignored if rbac.create is true
##
@@ -95,4 +95,13 @@ nodeSelector: {}

tolerations: []

-affinity: {}
+affinity:
+ nodeAffinity:
+   requiredDuringSchedulingIgnoredDuringExecution:
+     nodeSelectorTerms:
+       - matchExpressions:
+         - key: kubernetes.io/hostname
+           operator: In
+           values:
+             - controller-0
+             - controller-1

### now apply the helm charts:
cd stable
helm install nfs-server-provisioner --name nfsserver1 -f nfs-server-provisioner/values.yaml
```

check the storageclass "nfs":

```
$ kubectl get pods -n default
NAME                  READY STATUS RESTARTS AGE
nfsserver1-nfs-server-provisioner-0 1/1   Running 0       6d14h

$ kubectl get sc
NAME          PROVISIONER          AGE
general (default) ceph.com/rbd    75d
nfs           cluster.local/nfsserver1-nfs-server-provisioner 8d
```

Step 2) Prepare namespace for ONAP deployment

ssh to WRCP controller node, perform following commands:

```
kubectl create ns onap

source /etc/platform/openrc

cat <<EOF > rbd-namespaces.yaml
classes:
- additionalNamespaces: [default, kube-public, onap]
  chunk_size: 64
  crush_rule_name: storage_tier_ruleset
  name: general
  pool_name: kube-rbdkube-system
  replication: 1
  userId: ceph-pool-kube-rbd
  userSecretName: ceph-pool-kube-rbd
EOF

system helm-override-update --values rbd-namespaces.yaml platform-integ-apps rbd-provisioner
kube-system

system application-apply platform-integ-apps
```

Step 3) Deploy ONAP with integration override values

```
git clone --recurse-submodules https://github.com/biny993/oom.git -b elalto-wrcp19.12
```

```

cd oom

rsync -avt kubernetes/helm/plugins ~/helm/

sed -i "/^enabled:/a\  echo sleep 30s\n  sleep 30s" ~/helm/plugins/deploy/deploy.sh
sed -i 's/for subchart in \*/for subchart in aaf cassandra mariadb-galera dmaap */'
~/helm/plugins/deploy/deploy.sh

helm deploy dev local/onap -f ./kubernetes/onap/resources/environments/public-cloud.yaml -
f ./integration-override.yaml --namespace onap

rsync -avt kubernetes/helm/plugins ~/helm/

```

Step 4) Verify and checkpoints

check statefulset, all should be ready

```
$ kubectl -n onap get sts
```

check jobs, all should be completed

```
$ kubectl -n onap get jobs.batch
```

Check pods states, all pods should be either in completed or running state, except the following one:

```
$ kubectl get pod
dev-aai-aai-graphgraph-67fdb7db7f-p8sxf      0/1  ImagePullBackOff  0          30m
```

Check PVC, all PVC should be in bound state

```
$ kubectl get pvc
```

[Attachment 7: Dump ONAP components status](#)

ONAP provisions: Update SO configurations

(Note, this step can be skipped in case ONAP is deployed with approach 2 above)

---ONAP SO VNF Adapter Rest API endpoint version shall be set to version “v2”

```
$ kubectl -n onap get configmap | grep so-so-bpmn-infra-app-configmap
```

```
$ kubectl -n onap edit configmap dev-so-so-bpmn-infra-app-configmap
```

in the section “vnf”, modify the rest endpoint:

vnf:

```
  endpoint: http://so-openstack-adapter.onap:8087/services/VnfAdapter
```

rest:

```
-   endpoint: http://so-openstack-adapter.onap:8087/services/rest/v1/vnfs
+   endpoint: http://so-openstack-adapter.onap:8087/services/rest/v2/vnfs
```

volume-groups:

rest:

```
  endpoint: http://so-openstack-adapter.onap:8087/services/rest/v1/volume-groups
```

```
$ kubectl get po -n onap |grep bpmn-infra
```

```
$ kubectl -n onap delete pod dev-so-so-bpmn-infra-65945c685d-cfw92
```

check if pods restarted

```
$ kubectl -n onap get po | grep so-so
```

ONAP Health Check

```
$ cd oom/kubernetes/robot/
```

```
$ ./ete-k8s.sh onap health
```

Please refer to the example output of ONAP health check: [Attachment 5: Example output of ONAP Health Check](#)

ONAP provisions: Populate demonstration data

```
$ cd oom/kubernetes/robot/
```

```
$ ./demo-k8s.sh onap init
```

Now wait about half an hour for completion of the demo data population: [Attachment 6: Example output of populating ONAP demo data](#)

In case of failure of init script, you may need populate necessary data , by curl command, refer to [Tip 2: Postman collections](#) for help curl commands in postman collection: requests 0,1,2,3,4, and populate demo VNFs by: \$./demo-k8s.sh onap distribute

Access to ONAP portals

Update hosts with following entries: <e.g. assume 10.12.6.76 is a k8s cluster node IP>

10.12.6.76 portal.api.simpledemo.onap.org

10.12.6.76 vid.api.simpledemo.onap.org

10.12.6.76 sdc.api.fe.simpledemo.onap.org

10.12.6.76 sdc.api.be.simpledemo.onap.org

10.12.6.76 sdc.workflow.plugin.simpledemo.onap.org

10.12.6.76 sdc.dcae.plugin.simpledemo.onap.org

10.12.6.76 portal-sdk.simpledemo.onap.org

10.12.6.76 policy.api.simpledemo.onap.org

10.12.6.76 aai.api.sparky.simpledemo.onap.org
10.12.6.76 cli.api.simpledemo.onap.org
10.12.6.76 msb.api.discovery.simpledemo.onap.org
10.12.6.76 msb.api.simpledemo.onap.org
10.12.6.76 clamp.api.simpledemo.onap.org
10.12.6.76 so.api.simpledemo.onap.org
10.12.6.76 sdnc.api.simpledemo.onap.org
10.12.6.76 so-monitoring

Use a browser (Chrome, Firefox) to open the following URL, and input username/password:

<https://portal.api.simpledemo.onap.org:30225/ONAPPORTAL/login.htm>

Here is the list of users with roles, passwords defaults to “demo123456!”:

Role	User ID	Password	
designer	cs0008	demo123456!	
tester	jm0007	demo123456!	
governance Rep	gv0001	demo123456!	
ops	op0001	demo123456!	
admin	demo	demo123456!	

Note 1: The first time to access applications of ONAP portal might end up with certification error, to workaround that, you need browse the following urls and add them as security exceptions.

1, <https://sdc.api.fe.simpledemo.onap.org:30207/sdc1/portal#!/adminDashboard>

2, <https://vid.api.simpledemo.onap.org:30200/vid/welcome.htm>

Note 2: in case that so-monitoring GUI fails to show up, use browser to open the following url directly:

<http://so-monitoring:30224/>

Phase 4: Register WRCP instance to ONAP

Registering WRCP to ONAP demands following information and multiple manual steps via curl command or postman:

- Keystone endpoint URL for OpenStack API access, along with Project(Tenant) name, Domain name, User ID, Password
- Tiller endpoint URL and Service account Token for Kubernetes API access
- Figure out a cloud region ID, e.g. Cloud Owner = WRCP2, Cloud Region ID = STXRegionOne

Step 1: Create a SO Cloud Site

```
$ kubectl -n onap get pod | grep mariadb-galera  
$ kubectl -n onap exec -ti dev-mariadb-galera-mariadb-galera-0 sh  
    mysql --user=so_admin --password=so_Admin123  
    USE catalogdb  
    select * from cloud_sites;  
    INSERT INTO cloud_sites(ID, REGION_ID, IDENTITY_SERVICE_ID, CLOUD_VERSION, CLLI,  
    ORCHESTRATOR) values("STXRegionOne", "STXRegionOne", "DEFAULT_KEYSTONE", "2.5",  
    "My_Complex", "multicloud");  
    select * from cloud_sites;  
    quit  
$ exit
```

Step 2: Create an AAI Cloud Region along with complex

Post following RestAPI to Create AAI Complex :

```
$ curl -X PUT \  
https://aai.api.sparky.simpledemo.onap.org:30233/aai/v16/cloud-  
infrastructure/complexes/complex/My_Complex \  
$
```

```
-H 'Accept: application/json' \
-H 'Authorization: Basic QUFJOkFBSQ==' \
-H 'Cache-Control: no-cache' \
-H 'Content-Type: application/json' \
-H 'Real-Time: true' \
-H 'X-FromAppId: jimmy-postman' \
-H 'X-TransactionId: 9999' \
-d '{
  "physical-location-id": "My_Complex",
  "data-center-code": "example-data-center-code-val-5556",
  "complex-name": "My_Complex",
  "identity-url": "example-identity-url-val-56898",
  "physical-location-type": "example-physical-location-type-val-7608",
  "street1": "example-street1-val-34205",
  "street2": "example-street2-val-99210",
  "city": "Beijing",
  "state": "example-state-val-59487",
  "postal-code": "100000",
  "country": "example-country-val-94173",
  "region": "example-region-val-13893",
  "latitude": "39.9042",
  "longitude": "106.4074",
  "elevation": "example-elevation-val-30253",
  "lata": "example-lata-val-46073"
}' -k
```

For **standalone** WRCP instance (compared to sub-cloud of WRCP Distributed Cloud), post following RestAPI request to ONAP MSB endpoint via curl command or postman (replace those placeholder marked by <>):

```
$ CLOUD_OWNER=WRCP2
$ CLOUD_REGIONID=STXRegionOne
$ curl -X PUT \
https://aai.api.sparky.simpledemo.onap.org:30233/aai/v16/cloud-infrastructure/cloud-regions/cloud-
region/${CLOUD_OWNER}/${CLOUD_REGIONID} \
-H 'Accept: application/json' \
-H 'Authorization: Basic QUFJOkFBSQ==' \
-H 'Cache-Control: no-cache' \
-H 'Content-Type: application/json' \
-H 'Postman-Token: 8b9b95ae-91d6-4436-90fa-69cb4d2db99c' \
-H 'Real-Time: true' \
-H 'X-FromAppId: jimmy-postman' \
-H 'X-TransactionId: 9999' \
-d '{
  "cloud-owner": "WRCP2",
  "cloud-region-id": "STXRegionOne",
  "cloud-type": "openstack",
  "owner-defined-type": "t1",
  "cloud-region-version": "starlingx",
  "complex-name": "My_Complex",
  "cloud-zone": "CloudZone",
  "sriov-automation": false,
  "identity-url": "",
  "cloud-extra-info": "{\"openstack-region-id\": \"RegionOne\", \"k8s-apiserver\": \"https://<wrcp
controller IP>:6443\", \"k8s-apitoken\": \"<service account token>\"}",
}
```

```
"relationship-list": {  
    "relationship": [  
        {  
            "related-to": "complex",  
            "relationship-label": "org.onap.relationships.inventory.LocatedIn",  
            "related-link": "/aai/v16/cloud-infrastructure/complexes/complex/My_Complex",  
            "relationship-data": [  
                {  
                    "relationship-key": "complex.physical-location-id",  
                    "relationship-value": "My_Complex"  
                }  
            ]  
        }  
    ],  
    "esr-system-info-list": {  
        "esr-system-info": [  
            {  
                "esr-system-info-id": "55f97d59-6cc3-49df-8e69-926565f00055",  
                "service-url": "http://<wrcp controller IP>:5000/v3",  
                "user-name": "<OpenStack username>",  
                "password": "<Openstack user pass>",  
                "system-type": "VIM",  
                "ssl-insecure": true,  
                "cloud-domain": "Default",  
                "default-tenant": "<OpenStack Project/Tenant name, e.g. onap-sb-01>"  
            }  
        ]  
    }  
},
```

```
]  
}  
}' -k
```

For **sub-cloud** of WRCP Distributed Cloud, post following RestAPI request to ONAP MSB endpoint via curl command or postman (replace those placeholder marked by <>):

```
CLOUD_OWNER=WRCP2  
CLOUD_REGIONID=STXRegionOne  
OPENSTACK_REGIONID=Alameda-0000
```

```
curl -X PUT \  
https://aaiaai.api.sparky.simpledemo.onap.org:30233/aaai/v16/cloud-infrastructure/cloud-  
regions/cloud-region/${CLOUD_OWNER}/${CLOUD_REGIONID} \  
-H 'Accept: application/json' \  
-H 'Authorization: Basic QUFJOkFBSQ==' \  
-H 'Cache-Control: no-cache' \  
-H 'Content-Type: application/json' \  
-H 'Postman-Token: 8b9b95ae-91d6-4436-90fa-69cb4d2db99c' \  
-H 'Real-Time: true' \  
-H 'X-FromAppId: jimmy-postman' \  
-H 'X-TransactionId: 9999' \  
-d '{  
    "cloud-owner": "WRCP2",  
    "cloud-region-id": "STXRegionOne",  
    "cloud-type": "openstack",  
    "owner-defined-type": "t1",  
    "cloud-region-version": "starlingx",
```

```
"complex-name": "My_Complex",
"cloud-zone": "CloudZone",
"sriov-automation": false,
"identity-url": "",

"cloud-extra-info": "{\"openstack-region-id\":\"Alameda-0000\", \"k8s-apiserver\":\"https://<wrcloud public OAM IP>:6443\", \"k8s-apitoken\":\"<service account token>\", \"isystem\": {\"software_version\": \"19.12\"} }",

"relationship-list": {
  "relationship": [
    {
      "related-to": "complex",
      "relationship-label": "org.onap.relationships.inventory.LocatedIn",
      "related-link": "/aai/v16/cloud-infrastructure/complexes/complex/My_Complex",
      "relationship-data": [
        {
          "relationship-key": "complex.physical-location-id",
          "relationship-value": "My_Complex"
        }
      ]
    }
  ]
},
"esr-system-info-list": {
  "esr-system-info": [
    {
      "esr-system-info-id": "55f97d59-6cc3-49df-8e69-926565f00055",
      "service-url": "http://<System Controller public OAM IP>:5000/v3",
      "user-name": "<OpenStack username>",
      "password": "<OpenStack password>"
    }
  ]
}
```

```

    "password": "<Openstack user pass>",

    "system-type": "VIM",

    "ssl-insecure": true,

    "cloud-domain": "Default",

    "default-tenant": "<OpenStack Project/Tenant name, e.g. onap-sb-01>"

}

]

}

}' -k

```

Step 3: Trigger MultiCloud registration process:

```

$ curl -X POST \
https://msb.api.discovery.simpledemo.onap.org:30283/api/multicloud-
starlingx/v1/${CLOUD_OWNER}/${CLOUD_REGIONID}/registry \
-H 'Accept: application/json' \
-H 'Cache-Control: no-cache' \
-H 'Content-Type: application/json' -k

```

Step 4: associate subscription with Cloud Region

Create Customer if necessary (e.g. democustomer1) :

```

$ curl -k --location --request PUT
'https://aai.api.sparky.simpledemo.onap.org:30233/aai/v16/business/customers/customer/democustomer1'
\
--header 'Authorization: Basic QUFJOkFBSQ==' \
--header 'X-FromAppId: AAI' \
--header 'Accept: application/json' \
--header 'Content-Type: application/json' \

```

```
--header 'X-TransactionId: 808b54e3-e563-4144-a1b9-e24e2ed93d4f' \
--data-raw '{
    "global-customer-id": "democustomer1",
    "subscriber-name": "democustomer1",
    "subscriber-type": "INFRA"
}'
```

Step 4: Add service type “cfw-k8s”:

```
$ curl -k --location --request PUT 'https://aaia.api.sparky.simpledemo.onap.org:30233/aai/v16/service-design-and-creation/services/service/cfw-k8s' \
--header 'Authorization: Basic QUFJOkFBSQ==' \
--header 'X-FromAppId: AAI' \
--header 'Accept: application/json' \
--header 'X-TransactionId: 808b54e3-e563-4144-a1b9-e24e2ed93d4f' \
--header 'Content-Type: application/json' \
--data-raw '{
    "service-id": "cfw-k8s",
    "service-description": "cfw-k8s"
}'
```

```
$ curl -k --location --request PUT
'https://aaia.api.sparky.simpledemo.onap.org:30233/aai/v16/business/customers/customer/democustomer1/service-subscriptions/service-subscription/cfw-k8s' \
--header 'Authorization: Basic QUFJOkFBSQ==' \
--header 'X-FromAppId: AAI' \
--header 'Accept: application/json' \
--header 'Content-Type: application/json' \
```

```
--header 'X-TransactionId: 808b54e3-e563-4144-a1b9-e24e2ed93d4f' \
--data-raw '{
  "service-id": "cfw-k8s"
}'
```

Step 5: Associate subscription to Cloud Region:

```
$ curl -k --location --request PUT
'https://aaiai.api.sparky.simpledemo.onap.org:30233/aaiv16/business/customers/customer/democustomer1/
service-subscriptions/service-subscription/cfw-k8s/relationship-list/relationship' \
--header 'Authorization: Basic QUFJOkFBSQ==' \
--header 'X-FromAppId: AAI' \
--header 'Accept: application/json' \
--header 'Content-Type: application/json' \
--header 'X-TransactionId: 808b54e3-e563-4144-a1b9-e24e2ed93d4f' \
--data-raw '{
  "related-to": "tenant",
  "related-link": "/aaiv16/cloud-infrastructure/cloud-regions/cloud-
region/WRCP2/STXRegionOne/tenants/tenant/fd32fdd20ff5467ebef2de63468eb2e4",
  "relationship-data": [
    {
      "relationship-key": "cloud-region.cloud-owner",
      "relationship-value": "WRCP2"
    },
    {
      "relationship-key": "cloud-region.cloud-region-id",
      "relationship-value": "STXRegionOne"
    }
  ]
}'
```

```
{  
    "relationship-key": "tenant.tenant-id",  
    "relationship-value": "fd32fdd20ff5467ebef2de63468eb2e4"  
}  
,  
"related-to-property": [  
    {  
        "property-key": "tenant.tenant-name",  
        "property-value": "onap-sb-01"  
    }  
]  
}'
```

Phase 5: CNF onboarding and service design

Refer to Phase 2, which develops and validates the CNF (cFW in this case), the following steps should be followed to onboard it to ONAP for service design.

Step 1: create a tar ball for the CNF helm chart

```
$ cd k8s/starlingx/demo  
$ CNF_NAME="cfwsriov1"  
$ CNF_ARTIFACT_NAME="${CNF_NAME}_cloudtech_k8s_charts.tgz"  
$ tar -czvf $CNF_ARTIFACT_NAME firewall-sriov/
```

Step 2: Wrap helm chart tar ball into a dummy heat template artifact

Copy the attachment files here: [base_dummy.yaml](#) , [base_dummy.env](#)

then apply following commands:

```
$ cat <<EOF> MANIFEST.json  
{  
  "name": "",  
  "description": "",  
  "data": [  
    {  
      "file": "base_dummy.yaml",  
      "type": "HEAT",  
      "isBase": "true",  
      "data": [  
        {
```

```
"file": "base_dummy.env",
  "type": "HEAT_ENV"
}

],
},
{
  "file": "${CNF_ARTIFACT_NAME}",
  "type": "CLOUD_TECHNOLOGY_SPECIFIC_ARTIFACTS"
}
]
}

EOF
```

```
$ zip ${CNF_NAME}_vsp.zip base_dummy.env base_dummy.yaml MANIFEST.json
$CNF_ARTIFACT_NAME
```

Now you have the VSP artifact named ‘cfwsriov1_vsp.zip’ ready for onboarding to SDC

Step 3: Onboard the VSP artifact ‘cfwsriov1_vsp.zip’ into ONAP SDC

Browser open URL: <https://portal.api.simpledemo.onap.org:30225/ONAPPORAL/login.htm>

Open SDC application from ONAP portal, onboard the artifact “cfwsriov1_vsp.zip” as VSP, import it as a VF ‘Cfwsriov1’ (follow the instructions: <https://docs.onap.org/en/elalto/guides/onap-user/design/vfcreation/index.html>).

Create Service ‘cfwsvc1’ and add the VF ‘cfwsriov1’, test the service model, approve it, and distribute it (follow the instructions: <https://docs.onap.org/en/elalto/guides/onap-user/design/service-design/index.html>).

Phase 6: Service Instantiation hence CNF instantiation and validation

Once the service ‘cfwsvc1’ is distributed, you can instantiate it through VID application of ONAP portal.

Refer to <https://docs.onap.org/en/elalto/submodules/vid.git/docs/instantiate.html> for detailed instruction

Step 1, Create service instance

Create service instance ‘cfw1’ from service model ‘cfwsvc1’, make sure you select “VNF_API(old)” from the VID index page,

The screenshot shows the ONAP VID application interface. On the left, there is a sidebar with the following navigation links:

- VID
- onap.110
- VID Home
- Search for Existing Service Instances
- Create New Service Instance
- Browse SDC Service Models
- Instantiation Status
- VNF Changes
- Test Environments
- Admin

The main content area has the following sections:

- ONAP**
- Welcome to VID**
- Contact Us**
- Please click here to contact us.**
- Test API for A-la-carte:** A dropdown menu currently set to **VNF_API (old)**.

Then browse Service Models, select “cfwsvc1”, click “deploy” button, assign name with ‘cfw1’

Step 2, Add node instance 'cfw1vf1' for service instance 'cfw1'

Add node instance 'cfw1vf1' for service instance 'cfw1', click the menu "add node instance" to add generic vnf: 'cfw1vf1': input the generic vnf name, select the cloud region: WRCP2_STXRegion, and the tenant 'onap-sb-01', then click confirm button , wait for its completion

Step 3, Preload VNF topology

Preload VNF topology for VF Module 'cfw1vf1vfmsriov1' via curl command or postman

```
$ curl -k --location --request POST
'https://sdnc.api.simpledemo.onap.org:30267/restconf/operations/VNF-API:preload-vnf-topology-operation'
\

--header 'Accept: application/json' \
--header 'Content-Type: application/json' \
--header 'X-TransactionId: 0a3f6713-ba96-4971-a6f8-c2da85a3176e' \
--header 'X-FromAppId: API client' \
--header 'Authorization: Basic
YWRtaW46S3A4Yko0U1hzek0wV1hsaGFrM2VlbGNzZTJnQXc4NHZhB0dHbUp2VXkyVQ==' \
--data-binary '{
  "input": {
    "request-information": {
      "notification-url": "onap.org",
      "order-number": "1",
      "order-version": "1",
      "request-action": "PreloadVNFRRequest",
      "request-id": "test"
    },
    "sdnc-request-header": {
      "svc-action": "reserve",
      "svc-notification-url": "http://onap.org:8080/adapters/rest/SDNCNotify",
      "svc-request-id": "test"
    }
  }
}'
```

```
    },  
  
    "vnf-topology-information": {  
  
        "vnf-assignments": {  
  
            "availability-zones": [],  
  
            "vnf-networks": [],  
  
            "vnf-vms": []  
  
        },  
  
        "vnf-parameters": [],  
  
        "vnf-topology-identifier": {  
  
            "generic-vnf-name": "cfw1vf1",  
  
            "generic-vnf-type": "cfwsvc1/cfwsriov1 0",  
  
            "service-type": "4ed97904-f3bc-48d9-a729-561dd9f83262",  
  
            "vnf-name": "cfw1vf1vfmsriov1'",  
  
            "vnf-type": "Cfwsriov1..base_dummy..module-0"  
  
        }  
  
    }  
  
}'
```

Check the following example about how to populate the VNF topology request body:

```

curl -k --location --request POST "https://sdnc.api.simpledemo.onap.org:30267/restconf/operational/service-instances"
--header 'Accept: application/json'
--header 'Content-Type: application/jsonc'
--header 'X-transaction-id: 0a3fe713-ba96-4571-adf8-c2da85a3176e'
--header 'X-transaction-type: AFNI client'
--header 'Authorization: Basic YWRtaW46ZTA4YVndIhnekuV1hcadPrM0UtbGQzR7Jngx4NRthh0dRhpG'
--data @av1.json

```

Service Instance Details

Subscriber Name:	democustomer1
Service Instance ID:	4ed97904-f3bc-48d9-a729-561dd9f83262
Service Type:	vfw-k8s
Model Name:	cw1srv
Model Version:	1.0

Virtual Network Function Details

VNF ID:	74434183-726e-4dd8-8ed6-4ba3e9e5e70a
VNF Name:	cfsvc4vf1
VNF Type:	cfw1srv/cfwsvrivo1 0
Service ID:	vfw-k8s
Prov Status:	PREPROV
Orchestration Status:	Created
In Maint:	false
Is Closed Loop Disabled:	false
Resource Version:	1583145128851
Model ID:	4d972d6a-e651-4a0f-9506-5dab8160c428
Model Version ID:	cce930a0-231a-4d4d-8793-f3acf2978a63

Snapshot 3: populate VNF Topology request data, generic VNF and service type

```

curl -k --location --request POST "https://sdnc.api.simpledemo.onap.org:30267/restconf/operations/service-instances"
--header 'Accept: application/json'
--header 'Content-Type: application/jsonc'
--header 'X-transaction-id: 0a3fe713-ba96-4571-adf8-c2da85a3176e'
--header 'X-transaction-type: AFNI client'
--header 'Authorization: Basic YWRtaW46ZTA4YVndIhnekuV1hcadPrM0UtbGQzR7Jngx4NRthh0dRhpG'
--data @av1.json

```

Create VF Module -- a la carte

Service Name:	cfsrv
Subscriber Name:	democustomer1
Service Instance Name:	cfsvc4
Model Name:	Cfwsvrivo1.base_dummy.module-0
Model Invariant UUID:	ab251f34-4434-4ba2-bd99-29701c06548f
Model Version:	1
Model UUID:	2b254fac-14f9-4dfe-9903-18bb822d7f3b
Model Customization UUID:	432bcf13-93d0-41ae-a665-a18046c28cd6

User Provided Data (* indicates required field)

Instance Name: *	cfsvc4vf1vfmsr
LCP Region: *	STXRegionOne (WRCP2)
Tenant: *	onap-sb-01
Suppress Rollback on Failure:	false
SDN-C Pre-Load:	<input checked="" type="checkbox"/>
Upload Supplementary Data file:	<input checked="" type="checkbox"/>
Supplementary Data file (JSON format):	<input type="button" value="Browse..."/> supplemental1.json

Snapshot 4: populate VNF Topology request data, VF module part

Note, do not click “Confirm” button until runs to step 5 below.

Step 4, prepare supplement data file

Prepare override_values.yaml which override the helm charts’ values, encode the file content and put it into supplemental1.json for VF Module ‘cfsvc4vf1vfmsrivo1’

```
$ cat << EOF > override_values.yaml
```

```
global:
```

```
unprotectedNetProviderVlan: 29
protectedNetProviderVlan: 30
nodeAffinity:
  - label:
    labelkey: sriovdp
    op: In
    labelvalues:
      - enabled
  - label:
    labelkey: kube-cpu-mgr-policy
    op: In
    labelvalues:
      - static
EOF
```

```
$ OVERRIDE_VALUES_YAML_BASE64=`cat override_values.yaml | base64 -w 0`
```

```
$ cat <<EOF > supplemental1.json
[
  {
    "name": "definition-name",
    "value": "Cfwsriov1..base_dummy..module-0"
  },
  {
    "name": "definition-version",
    "value": "1"
},
EOF
```

```
{
  "name": "profile-name",
  "value": "p1"
},
{
  "name": "template_type",
  "value": "heat"
},
{
  "name": "override_values_yaml_base64",
  "value": "$ OVERRIDE_VALUES_YAML_BASE64"
}
]
EOF
```

Step 5, Add VF Module

Add VF Module ‘cfw1vf1vfmsriov1’ for node instance ‘cfw1vf1’

From the popup dialog window, input the VF module name, select the cloud region: WRCP2_STXRegion, and the tenant ‘onap-sb-01’, check on the following options:

- SDN-C Pre-Load
- Upload Supplementary Data file

Then upload the file ‘supplemental1.json’, click “confirm” button to start the VF module creation process and wait for its completion. This process will orchestrate cFW helm charts to WRCP instance. Hence you can check if the workload is deployed over WRCP instance with kubectl commands as well.

Step 6: validate the CNF deployment

Execute kubectl to check if deployments are there, check the pods status

```
$ kubectl get deployments -o wide --all-namespaces |grep firewall
```

```
$ kubectl get pods -o wide --all-namespaces |grep firewall
```

Monitor the traffic over SINK pod via browser: [http://\\$NODE_IP:30667/](http://$NODE_IP:30667/), you should observe the traffic statistics from the page. Refer to snapshot 1 for details.

Phase 7: Service deletion hence CNF deletion

With VID application GUI, Navigate to the deployed service instance 'cfw1' , delete VF module first, then delete node instance, then delete service.

Attachments

Attachment 1: integration-override.yaml

```
global:  
  repository: nexus3.onap.org:10001  
  pullPolicy: IfNotPresent  
  
robot:  
  enabled: true  
  flavor: large  
  
  appcUsername: "appc@appc.onap.org"  
  appcPassword: "demo123456!"  
  
  openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000>"  
  
  openStackPublicNetId: "<tenant network UUID for public access,e.g. 971040b2-7059-49dc-b220-4fab50cb2ad4>"  
  
  openStackTenantId: "<tenant ID of openstack user, e.g. 0e148b76ee8c42f78d37013bf6b7b1ae>"  
  
  openStackUserName: "<tenant username, e.g. demo>"  
  openStackUserDomain: "Default"  
  openStackProjectName: "VIM"  
  
  ubuntu14Image: "<glance image name for ubuntu14, e.g. ubuntu-14-04-cloud-amd64>"  
  ubuntu16Image: "<glance image name for ubuntu16, e.g. ubuntu-16-04-cloud-amd64>"  
  
  openStackPrivateNetId: "eda70926-a53f-458c-a621-40a64e72643d"  
  openStackPrivateSubnetId: "4ef0889a-406f-488b-934e-52b3ad6aef3a"  
  openStackPrivateNetCidr: "10.0.0.0/16"  
  openStackSecurityGroup: "aa534410-959e-4c40-9480-b3ae5ec1d8d8"  
  openStackOamNetworkCidrPrefix: "10.0"  
  dcaeCollectorIp: "10.12.6.149"  
  kubernetesExternalIp: "10.12.6.149"  
  vnfPubKey: "<public key for ssh access to vnf>"
```

```
demoArtifactsVersion: "1.6.0-SNAPSHOT"

demoArtifactsRepoUrl: "https://nexus.onap.org/content/repositories/releases"

scriptVersion: "1.6.0-SNAPSHOT"

nfsIpAddress: "10.12.6.253"

config:

  openStackEncryptedPasswordHere: "bbaef6cd76625ab9eb60deedea7dbb9"

  openStackSoEncryptedPassword: ""

so:

  enabled: true

  so-catalog-db-adapter:

    config:

      openStackUserName: "<tenant username, e.g. demo>"

      openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000>"

      openStackEncryptedPasswordHere: ""

so-bpmn-infra:

  config:

appc:

  enabled: true

  replicaCount: 3

  config:

    enableClustering: true

    openStackType: "OpenStackProvider"

    openStackName: "OpenStack"

    openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000/v2.0>"

    openStackServiceTenantName: "VIM"

    openStackDomain: "Default"

    openStackUserName: "<tenant username, e.g. demo>"
```

```
openStackEncryptedPassword: "<tenant user password>"  
mariadb-galera:  
    liveness:  
        initialDelaySeconds: 180  
        periodSeconds: 60  
  
sdnc:  
    enabled: true  
    replicaCount: 3  
  
config:  
    enableClustering: true  
  
mariadb-galera:  
    liveness:  
        initialDelaySeconds: 180  
        periodSeconds: 60  
  
aai:  
    enabled: true  
  
liveness:  
    initialDelaySeconds: 120  
  
aai-data-router:  
    liveness:  
    initialDelaySeconds: 120  
  
aai-sparky-be:  
    liveness:  
    initialDelaySeconds: 120  
  
aai-spike:  
    liveness:  
    initialDelaySeconds: 120
```

aai-cassandra:

replicaCount: 3

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

portal:

enabled: true

portal-cassandra:

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

vid:

enabled: true

aaf:

enabled: true

cassandra:

enabled: true

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

clamp:

enabled: true

cli:

enabled: true

```
consul:
  enabled: true

contrib:
  enabled: true

dcaege2:
  enabled: false

dmaap:
  enabled: true

dmaap-dr-prov:

mariadb:
  liveness:
    initialDelaySeconds: 180
    periodSeconds: 60

esr:
  enabled: true

log:
  enabled: false

log-logstash:
  replicaCount: 1

sniro-emulator:
  enabled: true

oof:
  enabled: true

oof-has:

music:
  music-cassandra:
    replicaCount: 3
```

```
liveness:  
  periodSeconds: 120  
  
readiness:  
  periodSeconds: 60  
  
music-tomcat:  
  replicaCount: 1  
  
mariadb-galera:  
  enabled: true  
  
liveness:  
  initialDelaySeconds: 180  
  periodSeconds: 60  
  
modeling:  
  enabled: true  
  
mariadb-galera:  
  liveness:  
    initialDelaySeconds: 180  
    periodSeconds: 60  
  
msb:  
  enabled: true  
  
multicloud:  
  enabled: true  
  image: onap/multicloud/framework:1.5.1  
  
multicloud-starlingx:  
  image: onap/multicloud/openstack-starlingx:1.5.5  
  
multicloud-k8s:  
  image: onap/multicloud/k8s:0.5.0  
  
nbi:
```

```
enabled: false

policy:
  enabled: true

pomba:
  enabled: false

sdc:
  enabled: true

sdc-cs:
  liveness:
    periodSeconds: 120

  readiness:
    periodSeconds: 60

sdc-be:
  liveness:
    initialDelaySeconds: 120
    periodSeconds: 120
    timeoutSeconds: 15

  readiness:
    initialDelaySeconds: 120
    periodSeconds: 120
    timeoutSeconds: 15

sdc-fe:
  livenessProbe:
    initialDelaySeconds: 120
    periodSeconds: 120
    timeoutSeconds: 15

  readinessProbe:
```

```
initialDelaySeconds: 120
periodSeconds: 120
timeoutSeconds: 15

uui:
  enabled: false

vfc:
  enabled: false

mariadb-galera:
  liveness:
    initialDelaySeconds: 180
    periodSeconds: 60

vnfsdk:
  enabled: false

cds:
  enabled: true
```

Attachment 2: onap-oom-lite.env

parameters:

ubuntu_1804_image: <glance image name for ubuntu16, e.g. ubuntu-18.04>

```
apt_proxy: ""
docker_proxy: nexus3.onap.org:10001

nfs_vm_flavor: m1.lm.xlarge
k8s_vm_flavor: m1.lm.xlarge
```

```
orch_vm_flavor: m1.lm.medium
```

```
public_net_id: <tenant network UUID for public access,e.g. 971040b2-7059-49dc-b220-4fab50cb2ad4>
```

```
oam_network_cidr: 10.0.0.0/16
```

```
oam_ext_network_cidr: 10.100.0.0/16
```

```
integration_gerrit_branch: master
```

```
helm_deploy_delay: 30s
```

```
integration_override_yaml: >
```

```
  global:
```

```
    repository: __docker_proxy__
```

```
    pullPolicy: IfNotPresent
```

```
  robot:
```

```
    enabled: true
```

```
    flavor: large
```

```
    appcUsername: "appc@appc.onap.org"
```

```
    appcPassword: "demo123456!"
```

```
    openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000>"
```

```
    openStackPublicNetId: "__public_net_id__"
```

```
    openStackTenantId: "${OS_PROJECT_ID}"
```

```
    openStackUserName: "${OS_USERNAME}"
```

```
    openStackUserDomain: "${OS_USER_DOMAIN_NAME}"
```

```
    openStackProjectName: "${OS_PROJECT_NAME}"
```

```
    ubuntu14Image: "<glance image name for ubuntu14, e.g. ubuntu-14-04-cloud-amd64>"
```

```
ubuntu16Image: "<glance image name for ubuntu16, e.g. ubuntu-16-04-cloud-amd64>"  
openStackPrivateNetId: "__oam_network_id__"  
openStackPrivateSubnetId: "__oam_subnet_id__"  
openStackPrivateNetCidr: "__oam_network_cidr__"  
openStackSecurityGroup: "__sec_group__"  
openStackOamNetworkCidrPrefix: "10.0"  
dcaeCollectorIp: "__k8s_01_vm_ip__"  
kubernetesExternalIp: "__k8s_01_vm_ip__"  
vnfPubKey: "<public key for ssh access to vnf>"  
demoArtifactsVersion: "1.6.0-SNAPSHOT"  
demoArtifactsRepoUrl: "https://nexus.onap.org/content/repositories/releases"  
scriptVersion: "1.6.0-SNAPSHOT"  
nfsIpAddress: "__nfs_ip_addr__"  
config:  
    openStackEncryptedPasswordHere: "${OS_PASSWORD_ENCRYPTED_FOR_ROBOT}"  
    openStackSoEncryptedPassword: "${OS_PASSWORD_ENCRYPTED}"  
so:  
    enabled: true  
    so-catalog-db-adapter:  
        config:  
            openStackUserName: "${OS_USERNAME}"  
            openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000/v2.0>"  
            openStackEncryptedPasswordHere: "${OS_PASSWORD_ENCRYPTED}"  
appc:  
    enabled: true  
    replicaCount: 3  
    config:
```

```
enableClustering: true

openStackType: "OpenStackProvider"

openStackName: "OpenStack"

openStackKeyStoneUrl: "<keystone endpoint, e.g. http://10.12.25.2:5000/v2.0>"

openStackServiceTenantName: "${OS_PROJECT_NAME}"

openStackDomain: "${OS_USER_DOMAIN_NAME}"

openStackUserName: "${OS_USERNAME}"

openStackEncryptedPassword: "${OS_PASSWORD}"

mariadb-galera:

liveness:

initialDelaySeconds: 180

periodSeconds: 60

sdnc:

enabled: true

replicaCount: 3

config:

enableClustering: true

mariadb-galera:

liveness:

initialDelaySeconds: 180

periodSeconds: 60

aai:

enabled: true

liveness:

initialDelaySeconds: 120

aai-data-router:

liveness:
```

initialDelaySeconds: 120

aai-sparky-be:

liveness:

initialDelaySeconds: 120

aai-spike:

liveness:

initialDelaySeconds: 120

aai-cassandra:

replicaCount: 3

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

portal:

enabled: true

portal-cassandra:

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

vid:

enabled: true

aaf:

enabled: true

cassandra:

enabled: true

liveness:

periodSeconds: 120

readiness:

periodSeconds: 60

clamp:

enabled: true

cli:

enabled: true

consul:

enabled: true

contrib:

enabled: true

dcaegen2:

enabled: false

dmaap:

enabled: true

dmaap-dr-prov:

mariadb:

liveness:

initialDelaySeconds: 180

periodSeconds: 60

esr:

enabled: true

log:

enabled: false

log-logstash:

replicaCount: 1

sniro-emulator:

```
enabled: true

oof:
  enabled: true

  oof-has:
    music:
      music-cassandra:
        replicaCount: 3

        liveness:
          periodSeconds: 120

        readiness:
          periodSeconds: 60

      music-tomcat:
        replicaCount: 1

  mariadb-galera:
    enabled: true

    liveness:
      initialDelaySeconds: 180

      periodSeconds: 60

  modeling:
    enabled: true

  mariadb-galera:
    liveness:
      initialDelaySeconds: 180

      periodSeconds: 60

msb:
  enabled: true

  multicloud:
```

```
enabled: true

image: onap/multicloud/framework:1.5.1

multicloud-starlingx:

    image: onap/multicloud/openstack-starlingx:1.5.5

multicloud-k8s:

    image: onap/multicloud/k8s:0.5.0

nbi:

    enabled: false

policy:

    enabled: true

pomba:

    enabled: false

sdc:

    enabled: true

    sdc-cs:

        liveness:

            periodSeconds: 120

        readiness:

            periodSeconds: 60

    sdc-be:

        liveness:

            initialDelaySeconds: 120

            periodSeconds: 120

            timeoutSeconds: 15

        readiness:

            initialDelaySeconds: 120

            periodSeconds: 120
```

```
timeoutSeconds: 15

sdc-fe:
  livenessProbe:
    initialDelaySeconds: 120
    periodSeconds: 120
    timeoutSeconds: 15

  readinessProbe:
    initialDelaySeconds: 120
    periodSeconds: 120
    timeoutSeconds: 15

  uui:
    enabled: false

  vfc:
    enabled: false

  mariadb-galera:
    liveness:
      initialDelaySeconds: 180
      periodSeconds: 60

vnfsdk:
  enabled: false

cds:
  enabled: true
```

Attachment 3: base_dummy.yaml

```
# =====LICENSE_START=====
```

```
# #  
# # Copyright (C) 2020 Wind River System Inc.  
# # SPDX-License-Identifier: Apache-2.0  
# #  
# =====LICENSE_END=====
```

heat_template_version: 2016-10-14

description: Heat template to deploy dummy VNF

parameters:

dummy_name_0:

type: string

label: name of vm

description: Dummy name

vnf_id:

type: string

label: id of vnf

description: Provided by ONAP

vnf_name:

type: string

label: name of vnf

description: Provided by ONAP

vf_module_id:

type: string

label: vnf module id
description: Provided by ONAP

dummy_image_name:
type: string
label: Image name or ID
description: Dummy image name

dummy_flavor_name:
type: string
label: flavor
description: Dummy flavor

resources:
dummy_0:
type: OS::Nova::Server
properties:
name: { get_param: dummy_name_0 }
image: { get_param: dummy_image_name }
flavor: { get_param: dummy_flavor_name }
metadata: { vnf_name: { get_param: vnf_name }, vnf_id: { get_param: vnf_id }, vf_module_id: { get_param: vf_module_id }}

Attachment 4: base_dummy.env

parameters:

```
vnf_id: PROVIDED_BY_ONAP
vnf_name: PROVIDED_BY_ONAP
vf_module_id: PROVIDED_BY_ONAP
dummy_name_0: dummy_1_0
dummy_image_name: dummy
dummy_flavor_name: dummy.default
```

Attachment 5: Example output of ONAP Health Check

```
oom/kubernetes/robot$ ./ete-k8s.sh onap health > h.1
oom/kubernetes/robot$ cat h.1
Starting Xvfb on display :90 with res 1280x1024x24
Executing robot tests at log level TRACE
=====
Testsuites
=====
Testsuites.Health-Check :: Test that ONAP components are available via basi...
=====
Basic A&AI Health Check | PASS |
-----
Basic AAF Health Check | PASS |
-----
Basic AAF SMS Health Check | PASS |
-----
Basic APPC Health Check | FAIL |
ConnectionError: HTTPSConnectionPool(host='appc.onap', port=8443): Max retries exceeded with url: /restconf/operations/SLI-API:healthcheck (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f90095faad0>: Failed to establish a new connection: [Errno -2] Name or service not known',)) |
-----
Basic CLI Health Check | FAIL |
ConnectionError: HTTPConnectionPool(host='cli.onap', port=8080): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f900445f190>: Failed to establish a new connection: [Errno -2] Name or service not known',)) |
-----
Basic CLAMP Health Check | FAIL |
```

ConnectionError: HTTPSConnectionPool(host='clamp.onap', port=8443): Max retries exceeded with url: /restservices/clds/v1/healthcheck (Caused by
NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004d21710>:
Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic DCAE Health Check	FAIL
-------------------------	------

ConnectionError: HTTPConnectionPool(host='dcae-healthcheck.onap', port=80): Max retries exceeded with url: /healthcheck (Caused by
NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004467bd0>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic DMAAP Data Router Health Check	PASS
--------------------------------------	------

Basic DMAAP Message Router Health Check	PASS
---	------

Basic DMAAP Bus Controller Health Check With Basic Auth	PASS
---	------

Basic External API NBI Health Check	FAIL
-------------------------------------	------

ConnectionError: HTTPConnectionPool(host='nbi.onap', port=8080): Max retries exceeded with url: /nbi/api/v4/status (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004d21a10>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Log Elasticsearch Health Check	FAIL
--------------------------------------	------

ConnectionError: HTTPConnectionPool(host='log-es.onap', port=9200): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f900445f210>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Log Kibana Health Check	FAIL
-------------------------------	------

ConnectionError: HTTPConnectionPool(host='log-kibana.onap', port=5601): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90061a7110>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Log Logstash Health Check	FAIL
---------------------------------	------

ConnectionError: HTTPConnectionPool(host='log-ls-http.onap', port=9600): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004d2ef90>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Microservice Bus Health Check	PASS
-------------------------------------	------

Basic Multicloud API Health Check	PASS
-----------------------------------	------

Basic Multicloud-pike API Health Check	PASS
--	------

Basic Multicloud-starlingx API Health Check	PASS
---	------

Basic Multicloud-titanium_cloud API Health Check	PASS
--	------

Basic Multicloud-vio API Health Check	PASS

Basic Multicloud-k8s API Health Check	PASS

Basic OOF-Homing Health Check	FAIL
ConnectionError: HTTPSConnectionPool(host='oof-has-api.onap', port=8091): Max retries exceeded with url: /v1/plans/healthcheck (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004441090>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic OOF-SNIRO Health Check	FAIL
ConnectionError: HTTPSConnectionPool(host='oof-osdf.onap', port=8698): Max retries exceeded with url: /api/oof/v1/healthcheck (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004441e50>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic OOF-CMSO Health Check	FAIL
ConnectionError: HTTPSConnectionPool(host='oof-cmso.onap', port=8080): Max retries exceeded with url: /cmso/v1/health?checkInterfaces=true (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004badad0>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic Policy Health Check	FAIL
ConnectionError: HTTPSConnectionPool(host='drools.onap', port=6969): Max retries exceeded with url: /healthcheck (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004456450>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic Pomba AAI-context-builder Health Check	FAIL
ConnectionError: HTTPConnectionPool(host='pomba-aaicontextbuilder.onap', port=9530): Max retries exceeded with url: /aaicontextbuilder/health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004be3e10>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic Pomba SDC-context-builder Health Check	FAIL
ConnectionError: HTTPConnectionPool(host='pomba-sdccontextbuilder.onap', port=9530): Max retries exceeded with url: /sdccontextbuilder/health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90043eb110>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic Pomba Network-discovery-context-builder Health Check	FAIL
ConnectionError: HTTPConnectionPool(host='pomba-networkdiscoveryctxbuilder.onap', port=9530): Max retries exceeded with url: /ndcontextbuilder/health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90043eb410>: Failed to establish a new connection: [Errno -2] Name or service not known',))	

Basic Pomba Service-Decomposition Health Check	FAIL

ConnectionError: HTTPConnectionPool(host='pomba-servicedecomposition.onap', port=9532): Max retries exceeded with url: /service-decomposition/health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90043f2b10>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Pomba Network-Discovery-MicroService Health Check | FAIL |
ConnectionError: HTTPSConnectionPool(host='pomba-networkdiscovery.onap', port=9531): Max retries exceeded with url: /health (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004407090>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Pomba Pomba-Kibana Health Check | FAIL |
ConnectionError: HTTPSConnectionPool(host='pomba-kibana.onap', port=5601): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.VerifiedHTTPSConnection object at 0x7f9004441fd0>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Pomba Elastic-Search Health Check | FAIL |
ConnectionError: HTTPConnectionPool(host='pomba-es.onap', port=9200): Max retries exceeded with url: / (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004414290>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Pomba Sdnc-Context-Builder Health Check | FAIL |
ConnectionError: HTTPConnectionPool(host='pomba-sdnctxbuilder.onap', port=9530): Max retries exceeded with url: /sdnccontextbuilder/health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90043eb650>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Pomba Context-Aggregator Health Check | FAIL |
ConnectionError: HTTPConnectionPool(host='pomba-contextaggregator.onap', port=9529): Max retries exceeded with url: /health (Caused by NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f900439db10>: Failed to establish a new connection: [Errno -2] Name or service not known',))

Basic Portal Health Check | PASS |

Basic SDC Health Check | PASS | (DMAaP:UP)

Basic SDNC Health Check | PASS |

Basic SO Health Check | PASS |

Basic UseCaseUI API Health Check | FAIL |
502 != 200

Basic VFC catalog API Health Check | FAIL |
502 != 200

Basic VFC emsdriver API Health Check 502 != 200	FAIL
Basic VFC gvnfmdriver API Health Check 502 != 200	FAIL
Basic VFC huaweivnfmdriver API Health Check 502 != 200	FAIL
Basic VFC jujuvnfmdriver API Health Check 502 != 200	FAIL
Basic VFC multivimproxy API Health Check 502 != 200	FAIL
Basic VFC nokiav2driver API Health Check 502 != 200	FAIL
Basic VFC ns lcm API Health Check 502 != 200	FAIL
Basic VFC resmgr API Health Check 502 != 200	FAIL
Basic VFC vnflcm API Health Check 502 != 200	FAIL
Basic VFC vnfmgr API Health Check 502 != 200	FAIL
Basic VFC vnfres API Health Check 502 != 200	FAIL
Basic VFC workflow API Health Check 502 != 200	FAIL
Basic VFC ztesdncdriver API Health Check 502 != 200	FAIL
Basic VFC ztevnfmdriver API Health Check 502 != 200	FAIL
Basic VID Health Check	PASS
Basic VNFSDK Health Check	FAIL
ConnectionError: HTTPConnectionPool(host='refrepo.onap', port=8702): Max retries exceeded with url: /onapapi/vnfsdk-marketplace/v1/PackageResource/healthcheck (Caused by	

```
NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f90042c86d0>: Failed to
establish a new connection: [Errno -2] Name or service not known',))
```

```
Basic Holmes Rule Management API Health Check | FAIL |
502 != 200
```

```
Basic Holmes Engine Management API Health Check | FAIL |
502 != 200
```

```
Basic Multicloud-fcaps API Health Check | PASS |
```

```
Basic Modeling genericparser API Health Check | FAIL |
502 != 200
```

```
Basic CDS Health Check | FAIL |
ConnectionError: HTTPConnectionPool(host='cds-blueprints-processor-http.onap', port=8080):
Max retries exceeded with url: /api/v1/execution-service/health-check (Caused by
NewConnectionError('<urllib3.connection.HTTPConnection object at 0x7f9004bc8750>: Failed to
establish a new connection: [Errno -2] Name or service not known',))
```

```
Testsuites.Health-Check :: Test that ONAP components are available... | FAIL |
61 critical tests, 19 passed, 42 failed
61 tests total, 19 passed, 42 failed
```

```
Testsuites | FAIL |
61 critical tests, 19 passed, 42 failed
61 tests total, 19 passed, 42 failed
```

```
Output: /share/logs/0000_ete_health/output.xml
Log:   /share/logs/0000_ete_health/log.html
Report: /share/logs/0000_ete_health/report.html
```

Attachment 6: Example output of populating ONAP demo data

```
$ ./demo-k8s.sh onap init
```

```
Number of parameters:
```

```
2
```

```
KEY:
```

```
init
```

```
++ kubectl --namespace onap get pods
```

```
++ sed 's/ .*/'
```

```
++ grep robot
+ POD=dev-robot-robot-65cd75cc96-r9xqc
++ dirname ./demo-k8s.sh
+ DIR=.
+ SCRIPTDIR=scripts/demoscript
+ ETEHOME=/var/opt/ONAP
+ '[' ']'
++ kubectl --namespace onap exec dev-robot-robot-65cd75cc96-r9xqc -- bash -c 'ls -1q /share/logs/ | wc -l'
+ export GLOBAL_BUILD_NUMBER=1
+ GLOBAL_BUILD_NUMBER=1
++ printf %04d 1
+ OUTPUT_FOLDER=0001_demo_init
+ DISPLAY_NUM=91
+ VARIABLEFILES=' -V /share/config/robot_properties.py'
+ kubectl --namespace onap exec dev-robot-robot-65cd75cc96-r9xqc -- /var/opt/ONAP/runTags.sh -V /share/config/robot_properties.py -d /share/logs/0001_demo_init -i InitDemo --display 91
Starting Xvfb on display :91 with res 1280x1024x24
Executing robot tests at log level TRACE
```

Testsuites

```
Testsuites.Demo :: Executes the VNF Orchestration Test cases including setu...
```

Initialize Customer And Models	PASS
--------------------------------	------

Initialize SO Openstack Identity For V3	PASS
---	------

```
Testsuites.Demo :: Executes the VNF Orchestration Test cases incl... | PASS |
```

```
2 critical tests, 2 passed, 0 failed
```

```
2 tests total, 2 passed, 0 failed
```

```
=====
Testsuites | PASS |
```

```
2 critical tests, 2 passed, 0 failed
```

```
2 tests total, 2 passed, 0 failed
```

```
=====
Output: /share/logs/0001_demo_init/output.xml
```

```
Log: /share/logs/0001_demo_init/log.html
```

```
Report: /share/logs/0001_demo_init/report.html
```

Attachment 7: Dump ONAP components status

```
$ kubectl -n onap get sts
NAME           READY   AGE
dev-aaf-aaf-sms-quorumclient   3/3    41m
dev-aaf-aaf-sms-vault         1/1    41m
dev-cassandra-cassandra     3/3    41m
dev-consul-consul-server     3/3    29m
dev-dmaap-dbc-pg              2/2    39m
dev-dmaap-dmaap-dr-db        2/2    39m
dev-dmaap-dmaap-dr-node      1/1    39m
dev-dmaap-message-router     1/1    39m
dev-dmaap-message-router-kafka 3/3    39m
dev-dmaap-message-router-zookeeper 3/3    39m
dev-mariadb-galera-mariadb-galera 3/3    40m
dev-multicloud-multicloud-k8s-etcd 1/1    26m
dev-multicloud-multicloud-k8s-mongo 1/1    26m
dev-sdnc-nengdb                1/1    23m
dev-sdnc-sdnc                  3/3    23m
dev-vid-vid-mariadb-galera    1/1    21m
```

```
$ kubectl -n onap get jobs.batch
NAME          COMPLETIONS DURATION   AGE
dev-aaf-aaf-sms-preload    1/1      3m19s    41m
dev-aaf-aaf-sshsm-distcenter 1/1      40s       41m
```

dev-aaf-aaf-sshsm-testca	1/1	56s	41m
dev-aaai-aai-graphadmin-create-db-schema	1/1	109s	30m
dev-aaai-aai-traversal-update-query-data	1/1	4m3s	30m
dev-portal-portal-db-config	1/1	8m11s	25m
dev-sdc-sdc-be-config-backend	1/1	17m	24m
dev-sdc-sdc-cs-config-cassandra	1/1	2m44s	24m
dev-sdc-sdc-dcae-be-tools	1/1	22m	24m
dev-sdc-sdc-es-config-elasticsearch	1/1	2m21s	24m
dev-sdc-sdc-onboarding-be-cassandra-init	1/1	2m49s	24m
dev-sdc-sdc-wfd-be-workflow-init	1/1	2m56s	24m
dev-sdnc-sdnc-dbinit-job	1/1	25s	23m
dev-so-so-mariadb-config-job	1/1	15s	22m
dev-vid-vid-galera-config	1/1	51s	21m

\$ kubectl -n onap get pod

NAME	READY	STATUS	RESTARTS	AGE
dev-aaf-aaf-cass-85c487dfb5-9vqdn	1/1	Running	0	41m
dev-aaf-aaf-cm-796979df57-p8t8f	1/1	Running	0	41m
dev-aaf-aaf-fs-74b94d67fb-s6vrq	1/1	Running	0	41m
dev-aaf-aaf-gui-79f5584b44-82t7s	1/1	Running	0	41m
dev-aaf-aaf-locate-7d6b56ff64-7g55p	1/1	Running	0	41m
dev-aaf-aaf-oauth-78cd4f9cd9-sz9vz	1/1	Running	0	41m
dev-aaf-aaf-service-5cf9c4fdf4-lsv6w	1/1	Running	0	41m
dev-aaf-aaf-sms-7855754576-2r5pb	1/1	Running	0	41m
dev-aaf-aaf-sms-preload-b2hrn	0/1	Completed	0	41m
dev-aaf-aaf-sms-quorumclient-0	1/1	Running	0	41m
dev-aaf-aaf-sms-quorumclient-1	1/1	Running	0	41m
dev-aaf-aaf-sms-quorumclient-2	1/1	Running	0	41m
dev-aaf-aaf-sms-vault-0	2/2	Running	1	41m
dev-aaf-aaf-sshsm-distcenter-jbwqs	0/1	Completed	0	41m
dev-aaf-aaf-sshsm-testca-6qgx4	0/1	Completed	0	41m
dev-aaai-aai-7744d85957-qwhwd	1/1	Running	0	30m
dev-aaai-aai-babel-5cb45654f4-5vwqj	2/2	Running	0	30m
dev-aaai-aai-data-router-b98c775c6-cqsbv	2/2	Running	0	30m
dev-aaai-aai-elasticsearch-5cb6b5f588-tcscq	1/1	Running	0	30m
dev-aaai-aai-graphadmin-5597fc59b8-s28lv	2/2	Running	0	30m
dev-aaai-aai-graphadmin-create-db-schema-8fq9c	0/1	Completed	0	30m
dev-aaai-aai-graphgraph-67fdb7db7f-p8sxsf	0/1	ImagePullBackOff	0	30m
dev-aaai-aai-modelloader-77bb578995-l5zrt	2/2	Running	0	30m
dev-aaai-aai-resources-6879867dc4-dc84h	2/2	Running	0	30m
dev-aaai-aai-schema-service-66499c6fd9-ltl8z	2/2	Running	0	30m
dev-aaai-aai-search-data-7d78b7bffd-bf4pb	2/2	Running	0	30m
dev-aaai-aai-sparky-be-94f6b77d6-qjznm	2/2	Running	0	30m
dev-aaai-aai-traversal-6d75c9c9f5-qk5ff	2/2	Running	0	30m
dev-aaai-aai-traversal-update-query-data-t6d8b	0/1	Completed	0	30m
dev-cassandra-cassandra-0	1/1	Running	0	41m
dev-cassandra-cassandra-1	1/1	Running	0	37m
dev-cassandra-cassandra-2	1/1	Running	0	35m

dev-consul-consul-9bfcd7669-qxldh	1/1	Running	0	29m
dev-consul-consul-server-0	1/1	Running	0	29m
dev-consul-consul-server-1	1/1	Running	0	28m
dev-consul-consul-server-2	1/1	Running	0	28m
dev-dmaap-dbc-pg-0	1/1	Running	0	39m
dev-dmaap-dbc-pg-1	1/1	Running	0	39m
dev-dmaap-dbc-pgpool-857685c9bd-lfv5r	1/1	Running	0	39m
dev-dmaap-dbc-pgpool-857685c9bd-mmzsl	1/1	Running	0	39m
dev-dmaap-dmaap-bc-56f7b66ff9-sgpvx	1/1	Running	0	39m
dev-dmaap-dmaap-dr-db-0	1/1	Running	0	39m
dev-dmaap-dmaap-dr-db-1	1/1	Running	0	38m
dev-dmaap-dmaap-dr-node-0	2/2	Running	0	39m
dev-dmaap-dmaap-dr-prov-69746cf966-2kwb7	2/2	Running	0	39m
dev-dmaap-message-router-0	1/1	Running	0	39m
dev-dmaap-message-router-kafka-0	1/1	Running	0	39m
dev-dmaap-message-router-kafka-1	1/1	Running	0	39m
dev-dmaap-message-router-kafka-2	1/1	Running	0	39m
dev-dmaap-message-router-mirrormaker-6cc59dd8cd-9gglb	1/1	Running	0	39m
dev-dmaap-message-router-zookeeper-0	1/1	Running	0	39m
dev-dmaap-message-router-zookeeper-1	1/1	Running	0	39m
dev-dmaap-message-router-zookeeper-2	1/1	Running	0	39m
dev-mariadb-galera-mariadb-galera-0	1/1	Running	0	40m
dev-mariadb-galera-mariadb-galera-1	1/1	Running	0	39m
dev-mariadb-galera-mariadb-galera-2	1/1	Running	0	38m
dev-msb-kube2msb-86cdf8db6c-z5wkm	1/1	Running	0	27m
dev-msb-msb-consul-fc98d9574-9d2hd	1/1	Running	0	27m
dev-msb-msb-discovery-6bf79d47dd-gpqtk	2/2	Running	0	27m
dev-msb-msb-eag-8596f7b584-pgmq7	2/2	Running	0	27m
dev-msb-msb-iag-75774ff4bf-mfn6x	2/2	Running	0	27m
dev-multicloud-multicloud-6bd7767884-ljkb6	2/2	Running	0	26m
dev-multicloud-multicloud-azure-7bd74b7697-tpzhs	2/2	Running	0	26m
dev-multicloud-multicloud-fcaps-596b58945-7sj8t	3/3	Running	0	26m
dev-multicloud-multicloud-k8s-6dc84c5679-h2h2f	2/2	Running	2	26m
dev-multicloud-multicloud-k8s-etcd-0	1/1	Running	0	26m
dev-multicloud-multicloud-k8s-mongo-0	1/1	Running	0	26m
dev-multicloud-multicloud-lenovo-6dfb58c96c-qj228	2/2	Running	0	26m
dev-multicloud-multicloud-pike-77b578cf96-ld2tw	2/2	Running	0	26m
dev-multicloud-multicloud-starlingx-77fb6984b-x6xbw	3/3	Running	0	26m
dev-multicloud-multicloud-vio-68f89576bb-c6cvw	2/2	Running	0	26m
dev-multicloud-multicloud-windriver-7f886b8787-shjqt	3/3	Running	0	26m
dev-portal-portal-app-7778b4c6c4-7mkhp	2/2	Running	0	25m
dev-portal-portal-cassandra-7949bff6f6-kp7ph	1/1	Running	0	25m
dev-portal-portal-db-5bb5dbf8dc-n2nzh	1/1	Running	0	25m
dev-portal-portal-db-config-lqn9h	0/2	Completed	0	25m
dev-portal-portal-sdk-7fb88c57c-pbz88	2/2	Running	0	25m
dev-portal-portal-widget-7c944bf9b-2mwttw	1/1	Running	0	25m
dev-portal-portal-zookeeper-bf44d644f-d76jh	1/1	Running	0	25m
dev-robot-robot-65cd75cc96-r9xqc	1/1	Running	0	24m

dev-sdc-sdc-be-855ff6b44-jz5wh	2/2	Running	0	24m
dev-sdc-sdc-be-config-backend-9b5gd	0/1	Completed	0	24m
dev-sdc-sdc-cs-config-cassandra-nvhj7	0/1	Completed	0	24m
dev-sdc-sdc-dcae-be-5744545b65-wb5lw	2/2	Running	0	24m
dev-sdc-sdc-dcae-be-tools-pjrlc	0/1	Completed	0	3m52s
dev-sdc-sdc-dcae-dt-689997dfd6-bg62s	2/2	Running	0	24m
dev-sdc-sdc-dcae-fe-5488765bbf-tb6kk	2/2	Running	0	24m
dev-sdc-sdc-dcae-tosca-lab-7b4b46dc67-wcj22	2/2	Running	0	24m
dev-sdc-sdc-es-5c9788797-2wtw8	1/1	Running	0	24m
dev-sdc-sdc-es-config-elasticsearch-ggpvv	0/1	Completed	0	24m
dev-sdc-sdc-fe-68964747d5-zwxsn	2/2	Running	0	24m
dev-sdc-sdc-kb-655f754957-cwkg8	1/1	Running	0	24m
dev-sdc-sdc-onboarding-be-7656998885-kgbgs	2/2	Running	0	24m
dev-sdc-sdc-onboarding-be-cassandra-init-jrg9h	0/1	Completed	0	24m
dev-sdc-sdc-wfd-be-5884945bbb-q6wxh	1/1	Running	0	24m
dev-sdc-sdc-wfd-be-workflow-init-bvz4g	0/1	Completed	0	24m
dev-sdc-sdc-wfd-fe-6b85c4d87f-5npqq	2/2	Running	0	24m
dev-sdnc-nengdb-0	1/1	Running	0	23m
dev-sdnc-network-name-gen-7cf8b96dc4-ckmvw	1/1	Running	0	23m
dev-sdnc-sdnc-0	2/2	Running	0	23m
dev-sdnc-sdnc-1	2/2	Running	0	23m
dev-sdnc-sdnc-2	2/2	Running	0	23m
dev-sdnc-sdnc-ansible-server-587d8ffdfb-zk6m6	1/1	Running	0	23m
dev-sdnc-sdnc-dbinit-job-6bft2	0/1	Completed	0	23m
dev-sdnc-sdnc-dgbuilder-846dc6856-76cvb	1/1	Running	0	23m
dev-sdnc-sdnc-dmaap-listener-6bbc5bbd84-lbs66	1/1	Running	0	23m
dev-sdnc-sdnc-ueb-listener-6bd57b7f8-hqnnd	1/1	Running	3	23m
dev-so-so-58b5bd7f6-dctxd	1/1	Running	0	22m
dev-so-so-bpmn-infra-58c79778f6-g85bw	1/1	Running	0	22m
dev-so-so-catalog-db-adapter-84d9d75df-ms82j	1/1	Running	0	22m
dev-so-so-mariadb-config-job-2vrt9	0/1	Completed	0	22m
dev-so-so-monitoring-549567c8fd-m7jrz	1/1	Running	0	22m
dev-so-so-openstack-adapter-6b9f76cf45-gvrf8	1/1	Running	0	22m
dev-so-so-request-db-adapter-7898f95f4f-22ksx	1/1	Running	0	22m
dev-so-so-sdc-controller-5b69c5fbdf-ffwlIn	1/1	Running	0	22m
dev-so-so-sdnc-adapter-76464f9cf4-96z6s	1/1	Running	0	22m
dev-so-so-vfc-adapter-cf9854c5b-26xq9	1/1	Running	0	22m
dev-so-so-vnfm-adapter-6ff57c9b9-q94fb	1/1	Running	0	22m
dev-vid-vid-757cb484f5-bxp68	2/2	Running	0	21m
dev-vid-vid-galera-config-vrjsx	0/1	Completed	0	21m
dev-vid-vid-mariadb-galera-0	1/1	Running	0	21m

\$ kubectl -n onap get pvc

NAME	ACCESS MODES	STORAGECLASS	AGE	STATUS	VOLUME	CAPACITY
cassandra-data-dev-cassandra-cassandra-041d1-952f-ac1e56612fe7	2Gi	RWO	general	Bound	pvc-14f03b91-57fc-	

cassandra-data-dev-cassandra-cassandra-1						Bound	pvc-384b7492-1fbe-
4c3b-a7d7-8742e0b84abc	2Gi	RWO	general	38m			
cassandra-data-dev-cassandra-cassandra-2						Bound	pvc-4784401a-ca30-
4ca7-9c16-12efdc885383	2Gi	RWO	general	35m			
dev-aaf-aaf-cass-pvc						Bound	pvc-8ff2b9a7-82d2-41be-9b87-
5c1df1e4175e	20Gi	RWO	general	41m			
dev-aaf-aaf-config-pvc						Bound	pvc-985a9d65-1b42-41ac-bc4d-
41fd1ca6feeb	2Gi	RWX	nfs	41m			
dev-aaf-aaf-hello-pvc						Bound	dev-aaf-aaf-hello-pv
40M	RWX	nfs		41m			
dev-aaf-aaf-sms						Bound	pvc-3d475666-6218-4922-84c7-
1df24538941a	1Gi	RWO	general	41m			
dev-aaf-aaf-sms-quorumclient						Bound	pvc-c027d313-f829-467c-
bd76-90ff3f7ac8d0	10Mi	RWX	nfs	41m			
dev-aaf-aaf-sms-vault						Bound	pvc-fc830bd3-92fc-433e-baae-
fc7f9a198079	2Gi	RWO	general	41m			
dev-aaf-aaf-sshsm-data						Bound	pvc-c3a4d829-7dde-4386-9535-
803a55a81a37	10Mi	RWO	general	41m			
dev-aaf-aaf-sshsm-dbus						Bound	pvc-bd829e56-ee80-421c-9792-
e65afd7a7f61	10Mi	RWO	general	41m			
dev-aaf-aaf-sshsm-distcenter						Bound	pvc-bec97275-d4af-4b19-8b56-
e70b4e5006a6	10Mi	RWX	nfs	41m			
dev-aaf-aaf-status-pvc						Bound	pvc-23a07d9f-0195-47b7-af68-
d62d55769eee	2M	RWX	nfs	41m			
dev-dmaap-dbc-pg-data-dev-dmaap-dbc-pg-0						Bound	pvc-199d62d7-6902-
45b6-9087-ae01d55e13cd	1Gi	RWO	nfs	39m			
dev-dmaap-dbc-pg-data-dev-dmaap-dbc-pg-1						Bound	pvc-637a50dc-69f1-
4c6a-b81f-0754ff8eced3	1Gi	RWO	nfs	39m			
dev-dmaap-dmaap-dr-db						Bound	pvc-bbbd729d-ee79-4ddc-9e07-
badc53464df	1Gi	RWO	general	39m			
dev-dmaap-dmaap-dr-db-data-dev-dmaap-dmaap-dr-db-0						Bound	pvc-ef35fd56-
a1ae-48d5-a5f6-b8f723557011	1Gi	RWO	general	39m			
dev-dmaap-dmaap-dr-db-data-dev-dmaap-dmaap-dr-db-1						Bound	pvc-8b25dd54-
3a7f-4216-91d4-96986d2a9246	1Gi	RWO	general	38m			
dev-dmaap-dmaap-dr-node-event-logs-pvc-dev-dmaap-dmaap-dr-node-0						Bound	pvc-
3f108efa-37c6-4d17-ab49-99165152aab	1Gi	RWO	general	39m			
dev-dmaap-dmaap-dr-node-spool-data-pvc-dev-dmaap-dmaap-dr-node-0						Bound	pvc-
da3b7074-e8b8-49cf-b935-8e2fad7d7d4b	1Gi	RWO	general	39m			
dev-mariadb-galera-mariadb-galera						Bound	pvc-6c930af8-26e8-434c-
8569-9cbe6541b45b	2Gi	RWO	general	40m			
dev-mariadb-galera-mariadb-galera-data-dev-mariadb-galera-mariadb-galera-0						Bound	pvc-
b6381754-d614-4a0c-a5c5-91927632b1f6	2Gi	RWO	general	40m			
dev-mariadb-galera-mariadb-galera-data-dev-mariadb-galera-mariadb-galera-1						Bound	pvc-
f6930394-d56a-44a3-9f04-34ac7821b068	2Gi	RWO	general	39m			
dev-mariadb-galera-mariadb-galera-data-dev-mariadb-galera-mariadb-galera-2						Bound	pvc-
c0022aed-e374-4ec8-a13d-ce487a6d8a96	2Gi	RWO	general	38m			
dev-multicloud-multicloud-k8s-etcd-data-dev-multicloud-multicloud-k8s-etcd-0						Bound	pvc-
da164d94-1f38-4610-84b5-6e504aad6bc9	1Gi	RWO	general	26m			

dev-multicloud-multicloud-k8s-mongo-data						Bound	pvc-5650aea3-643a-
4dc5-9c32-77b319154997	1Gi	RWO	general	26m			
dev-multicloud-multicloud-windriver					Bound	pvc-2fc129d6-129f-4b4e-	
8bb1-6f38c53fa425	5Gi	RWO	general	26m			
dev-portal-portal-cassandra					Bound	pvc-3544fb81-7ad4-4441-b940-	
2bf388cba448	2Gi	RWO	general	25m			
dev-portal-portal-db					Bound	pvc-5634d597-dd46-48d6-9e65-	
c26b8b975eaa	2Gi	RWO	general	25m			
dev-robot-robot					Bound	pvc-a7eff314-abd6-4caf-b760-	
782486cae333	2Gi	RWX	nfs	25m			
dev-sdc-sdc-es					Bound	pvc-5a7554bd-7ce2-4f41-b99c-	
e2cb42c55ccd	2Gi	RWO	general	24m			
dev-sdc-sdc-onboarding-be-cert					Bound	pvc-9400daf5-5d19-4216-	
9ca9-73be724bcfac	10Mi	ROX	general	24m			
dev-sdnc-nengdb					Bound	pvc-c28b2ff2-8b30-4fd2-85b9-	
9603bfa56fb4	2Gi	RWO	general	23m			
dev-sdnc-nengdb-data-dev-sdnc-nengdb-0					Bound	pvc-5593360e-a862-	
4ace-ab18-c5ebfbe7d8c6	2Gi	RWO	general	23m			
dev-sdnc-sdnc-mdsal-dev-sdnc-sdnc-0					Bound	pvc-7e04d9ad-a47d-4772-	
80bc-795af24ad88c	1Gi	RWO	nfs	23m			
dev-sdnc-sdnc-mdsal-dev-sdnc-sdnc-1					Bound	pvc-121b2cb7-7b04-4aee-	
a57a-58aeee359f3	1Gi	RWO	nfs	23m			
dev-sdnc-sdnc-mdsal-dev-sdnc-sdnc-2					Bound	pvc-cd35b783-0ec5-4a3b-	
9504-7abe0fea74a1	1Gi	RWO	nfs	23m			
dev-sdnc-sdnc-pvc-certs					Bound	pvc-c26ca8d3-eba4-40a7-b025-	
31ede7a95751	50Mi	RWX	nfs	23m			
kafka-data-dev-dmaap-message-router-kafka-0					Bound	pvc-5c8a5d7b-fceb-	
47eb-ad06-087c2d55b351	2Gi	RWO	nfs	39m			
kafka-data-dev-dmaap-message-router-kafka-1					Bound	pvc-13d14c61-e000-	
4e4d-a5ef-b5a5e674e2f2	2Gi	RWO	nfs	39m			
kafka-data-dev-dmaap-message-router-kafka-2					Bound	pvc-04b36e03-de9e-	
4b5c-a255-b5fdd3d4f638	2Gi	RWO	nfs	39m			
zookeeper-data-dev-dmaap-message-router-zookeeper-0					Bound	pvc-e81f3e06-	
3d49-49bb-a45f-5cf34a5c8253	2Gi	RWO	general	39m			
zookeeper-data-dev-dmaap-message-router-zookeeper-1					Bound	pvc-dc529ac4-	
9625-4c65-8abe-979c6020b504	2Gi	RWO	general	39m			
zookeeper-data-dev-dmaap-message-router-zookeeper-2					Bound	pvc-dd482df9-	
8087-4d57-af8f-6607d6dcc86f	2Gi	RWO	general	39m			

Debug Tips

Tip 1: Tear down ONAP instance:

```
helm list |grep dev
helm del --purge dev-aaf dev-AAI dev-cassandra dev-consul dev-dmaap dev-msb dev-multicloud
dev-portal dev-robot dev-sdc dev-sdnc dev-so dev-vid dev-mariadb-galera dev

kubectl -n onap get jobs.batch | cut -d '' -f1 | xargs kubectl delete jobs.batch

kubectl -n onap get pvc | cut -d '' -f1 | xargs kubectl delete pvc
```

Tip 2: Postman collections

Postman imports following collection and environment to postman:

<https://github.com/biny993/oom/tree/elalto-wrcp19.12/postman>

Postman Requests	Intention	Involved Environment Variables
0,Get Example Cloud-Regions	Validate the postman connection to ONAP AAI service	ONAP_SERVICE_IP must be set with K8S IP for accessing ONAP services
1,declare Owning-Entity in AAI	Declare Owning entity	
2,Declare platform	Declare platform	
3,Declare lineOfBusiness	Declare line of business	
4,Declare project	Declare project	
5, Create a Complex	Create a Complex to AAI	CLOUD_COMPLEX must be set appropriately
6, Create a Cloud-Region	Create a Cloud Region to AAI	CLOUD_OWNER, CLOUD_REGIONID, K8S_APISERVER, K8S_APITOKEN, OS_REGION_ID, OS_AUTH_URL, OS_USERNAME, OS_PASSWORDOS_PROJECT_NAME must be set appropriately
7, Register To Multicloud	Trigger MultiCloud Registration process for a Cloud Region	
8, Get a k8s connectivity-info	Check if k8s endpoint is registered to multicloud-k8s service	
9, Create a Customer	Create a subscription customer	global-customer-id must be set appropriately
10, Create service type	Create service type	global-service-type must be set appropriately
11, Put a Customer subscription	Create customer subscription	
12, Put a Customer subscription relationship	Associate customer with subscription	

13, preload for VFmodule	Preload VNF topology to SDNC	gvnf_instance_name, gvnf_model_name, service_instance_uuid, vfmodule_instance_name, vfmodule_model_name must be set appropriately
--------------------------	------------------------------	--